



BNC8105-0316TB

**BNC Jack Crimp Bulkhead,
For RG174, RG188, RG316**

50Ω

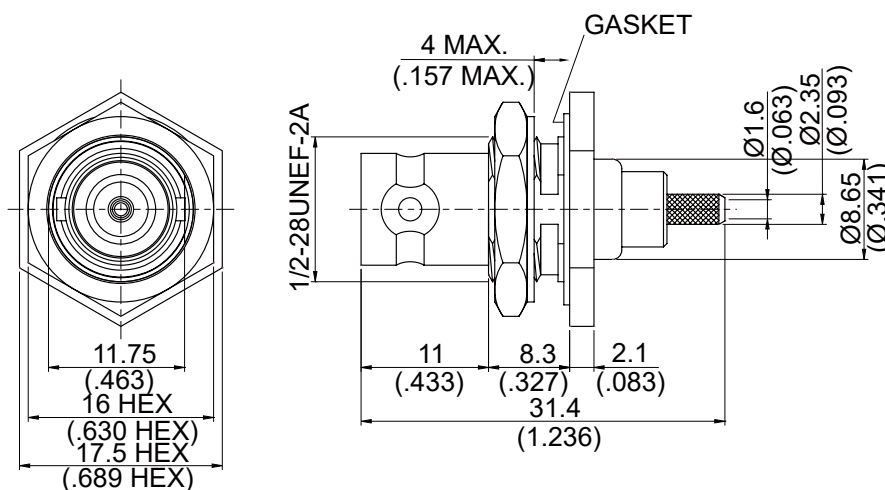

MOUNTING HOLE :



Note: Low cost two parts press fit body (Not IP67 Mated)

Parts	Material	Plating (Micro-inch)
Ferrule	Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Hex Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Washer	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicone	
Barrel	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Insulator	Teflon	
Contact Pin	Phosphor Bronze	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Small Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 15.68 g

Suitable Cables: RG174, RG188, RG316, RG316-FEP

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

BNC8105-0316TB


DATE

2021/07/30

REV

—

A

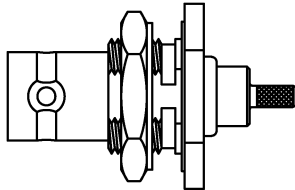

BODY + GASKET +
WASHER + HEX NUT

B



SMALL PIN

C




FERRULE

DIAGRAM

ASSEMBLY INSTRUCTION




Step 1: STRIP AS SHOWN.

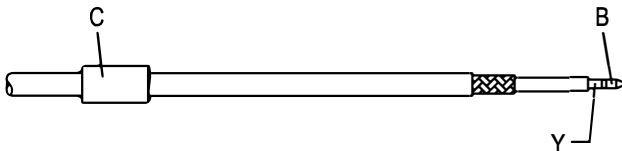


Step 2: SLIDE FERRULE " C " OVER CABLE.

Step 3: PUT PIN " B " ON CENTER CONDUCTOR AND CRIMP IN " Y ".
(USE SQUARE 0.7mm/0.028inch SECTION OF INSERT-A)

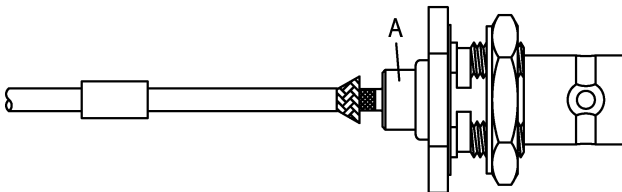

Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR " A " IN PLACE.

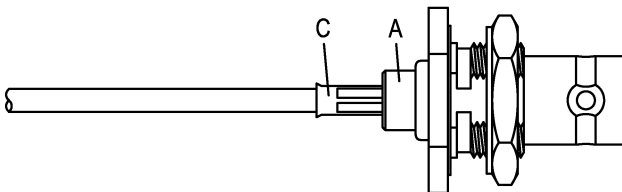

Step 5: SLIDE FERRULE " C " TOWARDS THE CONNECTOR " A " AND
CRIMP.
(USE 3.3mm/0.130inch HEX SECTION OF INSERT-A)

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

APPROVED

CHECKED

DRAWING

Albert