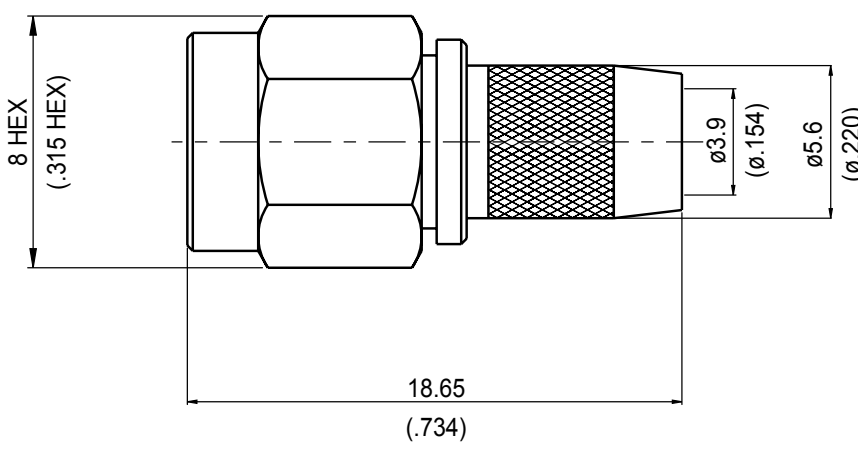


SMA3100-L240	SMA Plug Crimp For JBY240, LMR240 6GHz VSWR 1.2	50Ω																								
																										
<table border="1"> <thead> <tr> <th>Parts</th><th>Material</th><th>Plating(Micro-inch)</th></tr> </thead> <tbody> <tr> <td>Ferrule</td><td>Copper</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr> <tr> <td>Contact Pin</td><td>Brass</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr> <tr> <td>Renber Ring</td><td>Beryllium Copper</td><td>Tin-Zinc-Copper-Alloy 100 Over Copper 50</td></tr> <tr> <td>Gasket</td><td>Silicon</td><td></td></tr> <tr> <td>Insulator</td><td>Teflon</td><td></td></tr> <tr> <td>Body</td><td>Brass</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr> <tr> <td>Coupling Nut</td><td>Brass</td><td>Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20</td></tr> </tbody> </table>	Parts	Material	Plating(Micro-inch)	Ferrule	Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Renber Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50	Gasket	Silicon		Insulator	Teflon		Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20	Coupling Nut	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20		
Parts	Material	Plating(Micro-inch)																								
Ferrule	Copper	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																								
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																								
Renber Ring	Beryllium Copper	Tin-Zinc-Copper-Alloy 100 Over Copper 50																								
Gasket	Silicon																									
Insulator	Teflon																									
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																								
Coupling Nut	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20																								
Weight: 4.45 g Suitable Cables: LMR240, JBY240																										

This part number complies with RoHS.




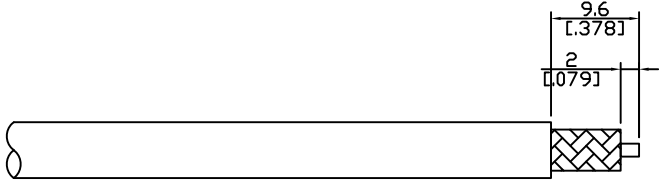
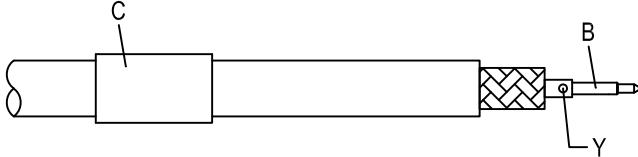
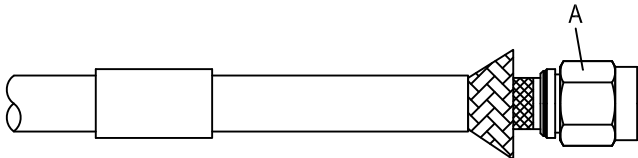
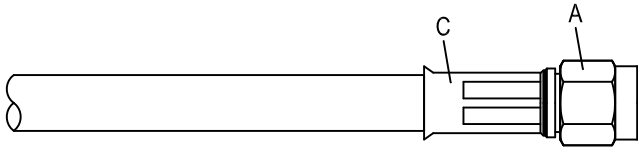
Notice: JYEBAO reserves the right to make modifications deemed appropriate.

SMA	SMA3100-L240
<div>Interface</div> MIL-STD-348B Mechanically compatible with 2.92 & 3.5	
<div>Electrical Data</div> Impedance 50Ω Frequency range DC to 6GHz VSWR ≤ 1.2 (DC to 6GHz) Insertion loss $\leq 0.04 \times \sqrt{f(\text{GHz})}$ dB Insulation resistance $\geq 5000\text{M}\Omega$ Contact resistance inner conductor $\leq 3\text{m}\Omega$ Contact resistance outer conductor $\leq 2\text{m}\Omega$ Dielectric withstanding voltage (at sea level) 1000 V rms Working voltage (at sea level) 335 V rms	
<div>Mechanical Data</div> Recommended coupling nut torque 4 inch lbs Coupling proof torque 5.3 inch lbs Coupling nut retention force ≥ 60.7 lbs Contact Captivation-axial ≥ 6.1 lbs Durability (mating) ≥ 100	
<div>Environmental Data</div> Temperature range -65°C to +165°C Thermal shock MIL-STD-202, Method 107, Condition B Moisture resistance MIL-STD-202, Method 106 Corrosion MIL-STD-202, Method 101, Condition B RoHS Compliant	
<div>Tooling</div> Crimping tool CRT-1 or CRT-2 Crimp insert INSERT-E	

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

JYE BAO CO., LTD.

CABLE ASSEMBLY INSTRUCTION

SMA3100-L240		DATE	2014/04/29	REV	—
A		B		C	
					
BODY		CONTACT PIN		FERRULE	
DIAGRAM			ASSEMBLY INSTRUCTION		
			Step 1: STRIP AS SHOWN.		
			Step 2: SLIDE FERRULE " C " OVER CABLE. Step 3: PUT PIN " B " ON CENTER CONDUCTOR AND SOLDERIN " Y ".		
			Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR " A " IN PLACE.		
			Step 5: SLIDE FERRULE " C " TOWARDS THE CONNECTOR " A " AND CRIMP. (USE 6.5mm/0.256inch HEX SECTION OF INSERT-E)		
This part number complies with RoHS. Notice: JYEBAO reserves the right to make modifications deemed appropriate.					
APPROVED		CHECKED		DRAWING	
				Albert	

SMA3100-L240

