

# DATA SHEET

**Customer :**


**Model No. :** 5,7-RO-RBH-H07

**Description :** 5200-5800 MHz RUBBER ANTENNA

**Date :** 2010/12/09

**Rev :** 1

## 1. OVERVIEW & SPECIFICATIONS

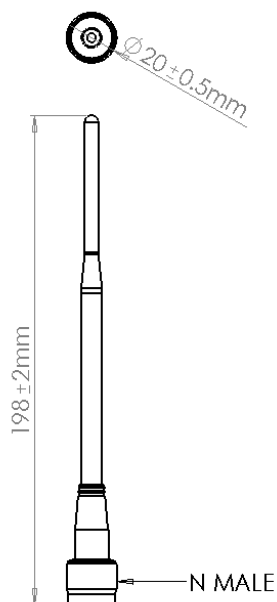

### Electrical Specifications:

Frequency Range :	5200-5800 MHz
VSWR :	$\leq 2.0$
Impedance :	$50\Omega \pm 5\Omega$
Gain :	5 dBi
Polarization :	Vertical
Power Handling :	10 Watt

### Mechanical Specifications:

Connector :	N MALE
Operation Temp. :	$-30^{\circ}\text{C} \sim +60^{\circ}\text{C}$
Material :	Radome: ABS Base: ABS
Dimension (L*W*H) :	$\varnothing 20 * 198 \text{mm} \pm 0.5 \text{mm}$
Weight :	$38 \pm 5 \text{g}$
Color :	Black

## 3D Illustration



## 2. TESTING CONDITION

### 2.1 TEST SETUP

VSWR measurement (S11): Use ROHDE & SCHWARZ ZV8 Network Analyzer with Harbour RG-142 coaxial cable: 1000mm length in free space.

#### 2.1.1 VSWR

The table as below summarizes concern about Return loss measurement according to The frequency band is based on PRO-CELL design. The detail be shown as appendix that is from ROHDE & SCHWARZ ZV8 Network Analyzer

VSWR Performance			
Freq(MHz)	<b>5300</b>	<b>5500</b>	<b>5800</b>
Free space	1.858	1.257	1.395

### 3. GAIN MEASUREMENT

#### 3.1 TEST SETUP

The gain of the antenna was measured by **PROCELL** Chamber. The chamber provides less than  $-30$  dB reflectivity from 800 MHz through 6 GHz and a 60cm diameter spherical quiet zone. The measurement results are calibrated using both **SCHWARZBECK** horn standards. A decoupling sleeve is used to reduce feed line radiation

#### 3.2 TEST RESULT

The peak gain is picked up as table list from Network analyzer in Chamber room, the completely gain plots also be shown as appendix.


Peak Gain (dBi) / Beam width( ° )				
Freq(MHz)	<b>5200</b>	<b>5300</b>	<b>5400</b>	<b>5500</b>
H PLANE	5.07 / 360	4.36 / 360	6.68 / 360	6.8 / 360
E PLANE	2.76 / 23	2.18 / 25.6	5.15 / 23.1	4.65 / 21.3

Peak Gain (dBi) / Beam width( ° )			
Freq(MHz)	<b>5600</b>	<b>5700</b>	<b>5800</b>
H PLANE	6.96 / 360	6.18 / 360	4.41/360
E PLANE	6.37 / 20.7	5.74 / 20.7	3.48/21.3


## 4. APPENDIX

### 4.1 RETURN LOSS & VSWR

#### RETURN LOSS

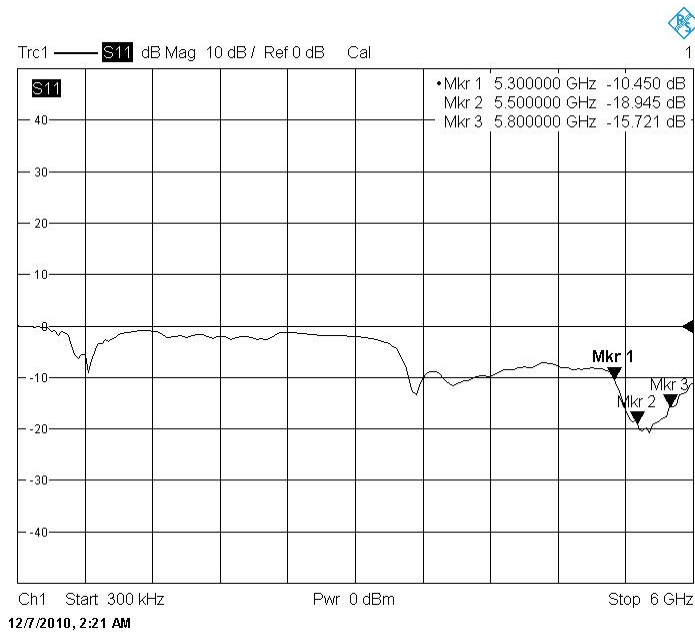


#### SWR

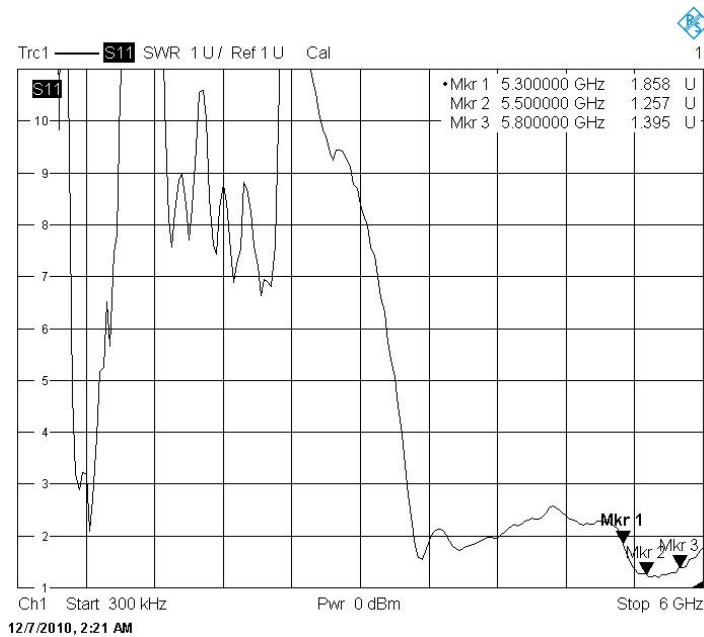

## 4.2 RADIATION PATTERN

### H-PLANE

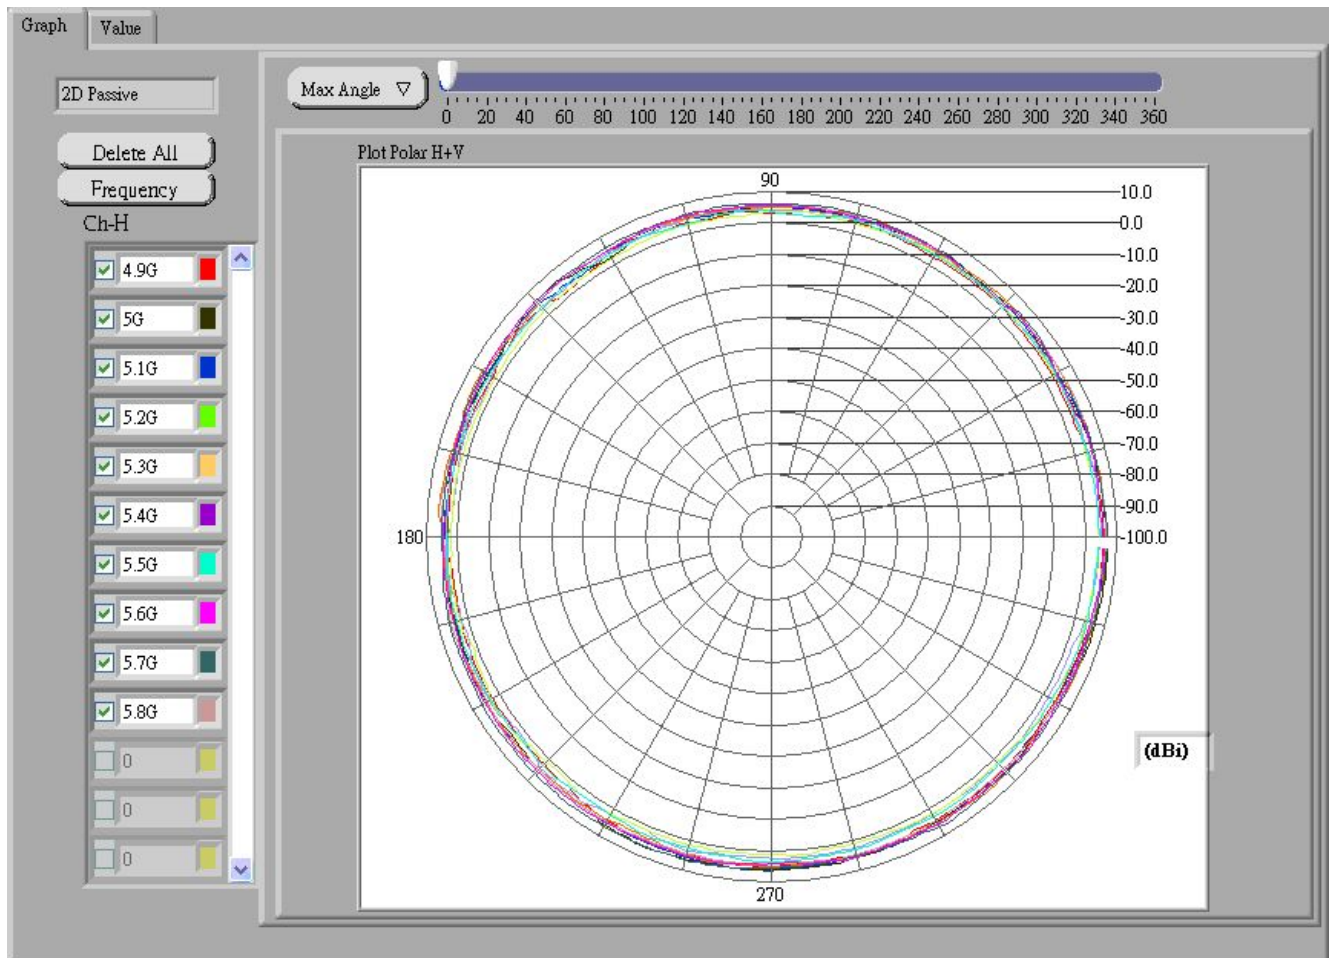

# E-PLANE

