


BNC Isolated Jack Crimp For Bulkhead 50Ω

CABLE ASSEMBLY INSTRUCTION

BNC8105T-0316

JYE BAO CO., LTD.

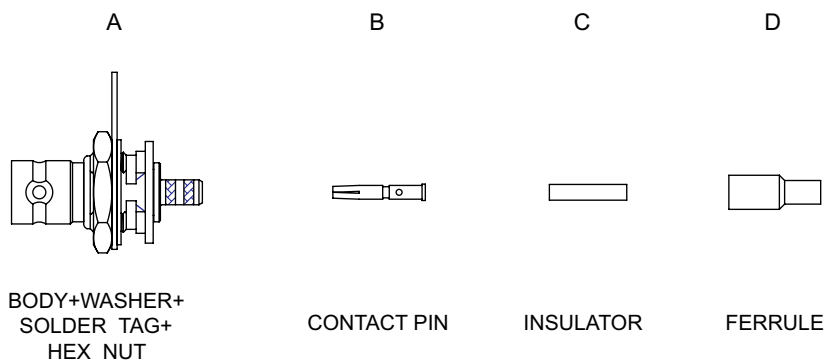

| DIAGRAM | ASSEMBLY INSTRUCTION |
|---------|---|
| | <p>Step 1: STRIP AS SHOWN .</p> |
| | <p>Step 2: SLIDE FERRULE " D " OVER CABLE.</p> <p>Step 3: LOOSEN BRAIDING AND SLIDE INSULATOR " C " IN PLACE.</p> <p>Step 4: PUT PIN " B " ON CENTER CONDUCTOR AND SOLDER IN " Y ".</p> |
| | <p>Step 5: SLIDE CONNECTOR " A " IN PLACE.</p> |
| | <p>Step 6: SLIDE FERRULE " D " TOWARDS THE CONNECTOR " A " AND CRIMP.</p> |

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.