


N3100BA-9L400

N Plug Crimp Right Angle

50Ω

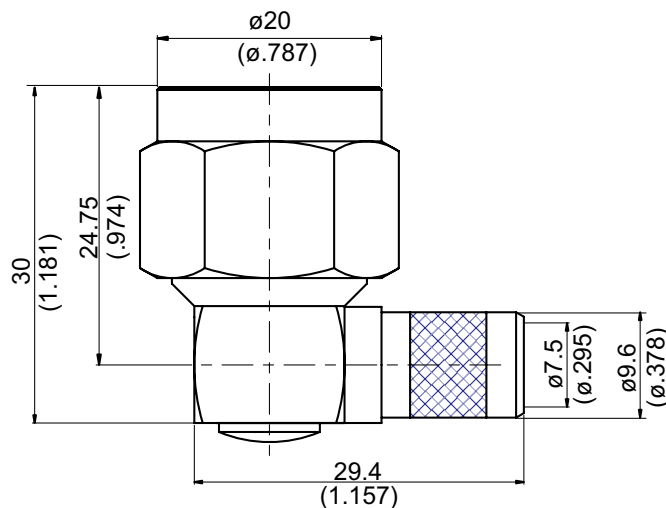

NOTE: 20 MM HEX NUT

Parts	Material	Plating(Micro-inch)
Contact Pin	Brass	Gold 5 Over Nickel 50 Over Copper 50
Barrel	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Renbrock Ring	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Gasket	Silicon	
Insulator	Teflon	
Contact Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 57.98 g

Suitable Cables: JBY400

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

N3100BA-9L400

JYE BAO CO., LTD.

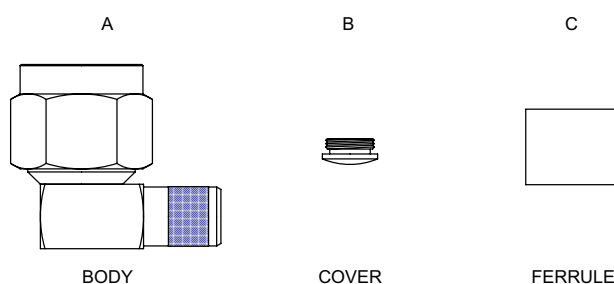


DIAGRAM	ASSEMBLY INSTRUCTION
The diagram shows a cable with a braided shield and a central conductor. The stripping dimensions are indicated: 24.3 [957] for the outer jacket, 11.7 [461] for the braided shield, and 5.4 [213] for the central conductor.	Step 1: STRIP AS SHOWN .
The diagram shows the ferrule C being slid over the cable. The center conductor is inserted into the contact pin Y of connector A.	Step 2: SLIDE FERRULE " C " OVER CABLE . Step 3: WRAP THE BRAIDING UPWARDS. Step 4: SLIDE CENTER CONDUCTOR ON THE CONTACT PIN OF CONNECTOR " A " AND SOLDER IN "Y"
The diagram shows the ferrule C being slid towards the connector A and crimped.	Step 5: SLIDE FERRULE " C " TOWARDS THE CONNECTOR " A " AND CRIMP .
The diagram shows the cover B being screwed onto the connector body A.	Step 6: FINALLY SCREW " B " ON THE CONNECTOR BODY " A ".

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.