

ELECTRICAL SPECIFICATIONS:

1.) FREQUENCY RANGE:	350 - 1000 MHz
2.) IMPEDANCE:	50 OHMS
3.) INSERTION LOSS (MAX):	0.5 dB (ABOVE 3.01 dB SPLIT)
4.) AMPLITUDE BALANCE (MAX):	0.2 dB
5.) PHASE BALANCE (MAX):	2 DEGREES
6.) ISOLATION (MIN):	22 dB
7.) INPUT VSWR (MAX):	1.20 : 1
8.) OUTPUT VSWR (MAX):	1.15 : 1

MECHANICAL SPECIFICATIONS:


1.) CONNECTORS:	TYPE N FEMALE (JACK), 50 OHM
2.) CONNECTOR BODY:	BRASS, TRI-ALLOY PLATE
3.) CONNECTOR PIN:	PHOSPHOR BRONZE, GOLD PLATE
4.) INSULATOR:	PTFE, VIRGIN ELECTRICAL GRADE
5.) HOUSING:	ALUMINUM, CLEAR CHEM FILM
6.) SOLDER:	LEAD FREE, RoHS COMPLIANT
7.) PROTECTION RATING:	IP67 WATER AND WEATHER RESISTANT
8.) OPERATING TEMP:	-65°C TO +85°C
9.) WEIGHT:	258 GRAMS

RF INPUT POWER RATING (POWER DIVIDER SPLITTER):

INTO MATCHED LOAD VSWR's	IN-PHASE	180° OUT-OF-PHASE
1.2 : 1	30 WATTS	30 WATTS
2.0 : 1	30 WATTS	7.5 WATTS
∞	15 WATTS	0.75 WATTS

RF INPUT POWER RATING (POWER COMBINER):

COHERENT SIGNALS (IN-PHASE)	2 X 15 WATTS
COHERENT SIGNALS (180° OUT-OF-PHASE)	2 X 0.375 WATTS
NON-COHERENT SIGNALS	2 X 0.75 WATTS
OTHER CONDITIONS - CONSULT FACTORY	

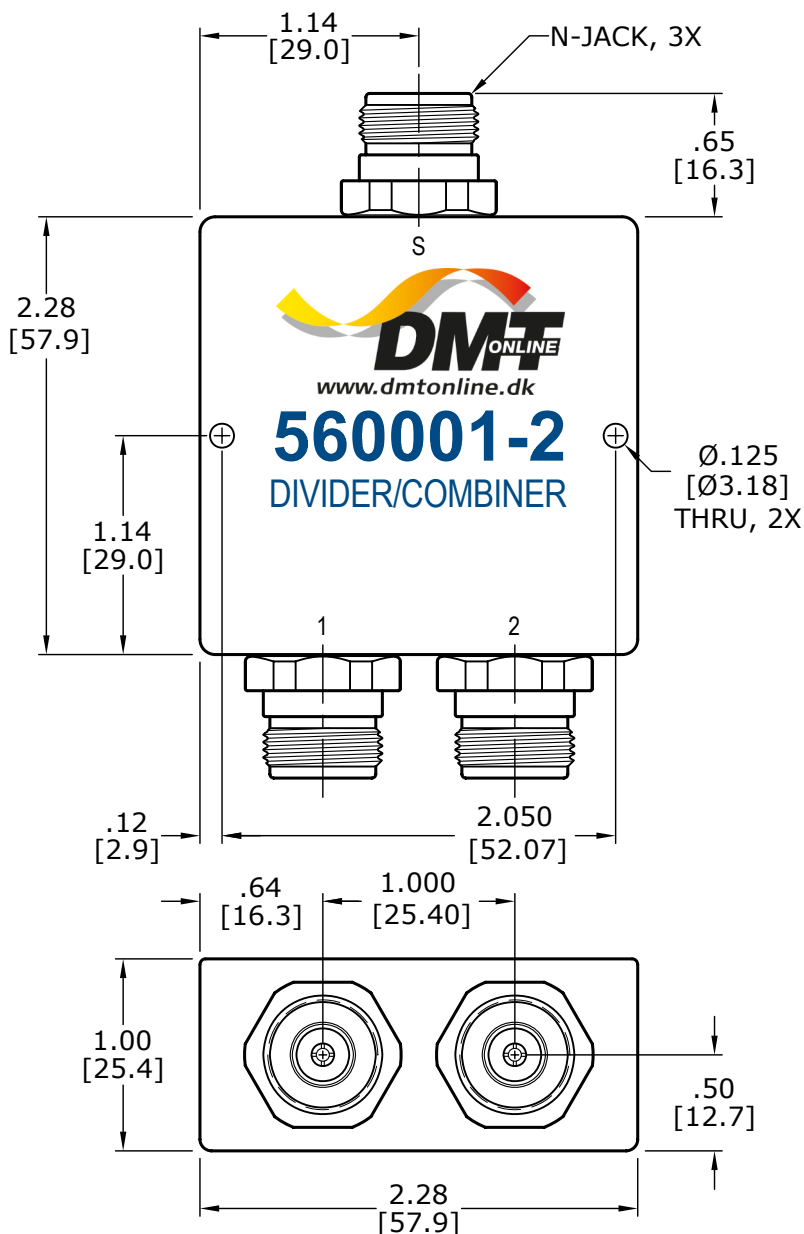

REV	DESCRIPTION	BY	DATE	TOLERANCES	
				INCHES	MILLIMETERS
				.00 = ±.01	.0 = ±.25
				.000 = ±.004	.00 = ±.10
				DRAWN: MJD	APPROVED: EMM
				DATE: 09/28/09	DATE: 09/28/09



MODEL NO.

560001-2

TITLE 2 WAY POWER DIVIDER COMBINER, N TYPE,
350-1000 MHz, 30W, 50 OHM, 0 DEGREE,
(IN-PHASE), RoHS, IP67 WEATHERPROOF