

5711-10-6G-10DB

Fixed attenuators are placed in signal paths to reduce power transmission and are set at a fixed attenuation by symmetrical resistive networks that follows a T, L or Pi configuration. Their configuration can either be in waveguide, in surface mount or coaxial, and depending on their application, they can either be directional or bidirectional.

Connector material: brass gold plated

Product surface treatment: aluminum casing cleaning passivation

Nominal impedance: 50Ω

Temperature range: -55 ° C ~ +125 ° C

Connector: N(J-K) male input and female output

Dimensions: Ø20×68.2mm

Weight:100g

Performance:


Average Power:10W

Frequency range: DC-6GHz

Attenuation:3, 6,10,15,20,30,40dB available, and 3-30dB ±0.5dB, 40dB±1dB

VSWR:≤1.25

PHYSICAL DIMENSIONS:

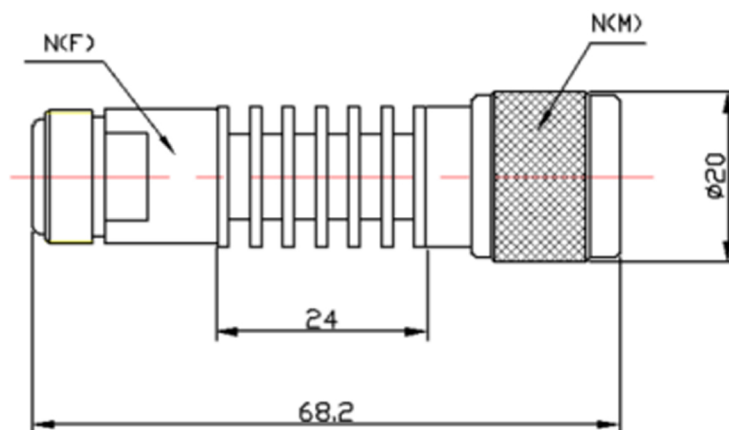

Unit:mm
Dimension tolerance:±2%