


UHF male to female Right Angle adaptor Specification

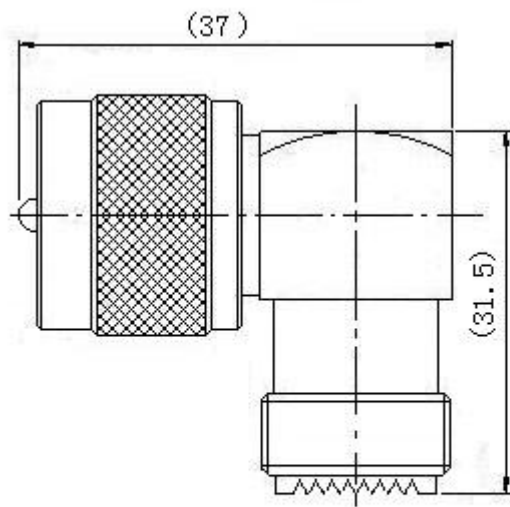

Temp.range	-65°C~+165°C
Vibration	MIL-STD-202, Method 213
Impedance	50Ω
Frequency Range	DC~500MHz
Working Voltage	1000V max
Withstand Voltage	2500V rms (at sea level)
Contact resistance	
Center Contact	≤ 1 mΩ
Outer Contact	≤1 mΩ
Insulation resistance	≥ 5000 MΩ
VSWR Straight	≤ 1.15
Right angle	≤ 1.25
Durability(mating)	≥500 (cycles)

MATERIAL & PLATING

shell:	brass	nickel plated
socket:	brass	gold or silver plated
elastic contact:	tin brass	gold or silver plated
insulator:	PTFE or PE	
o-ring sealing:	6146	silastic

APPLICABLE STANDARD

MIL-C-39012;

CECC 22210;

IEC 60169-16..