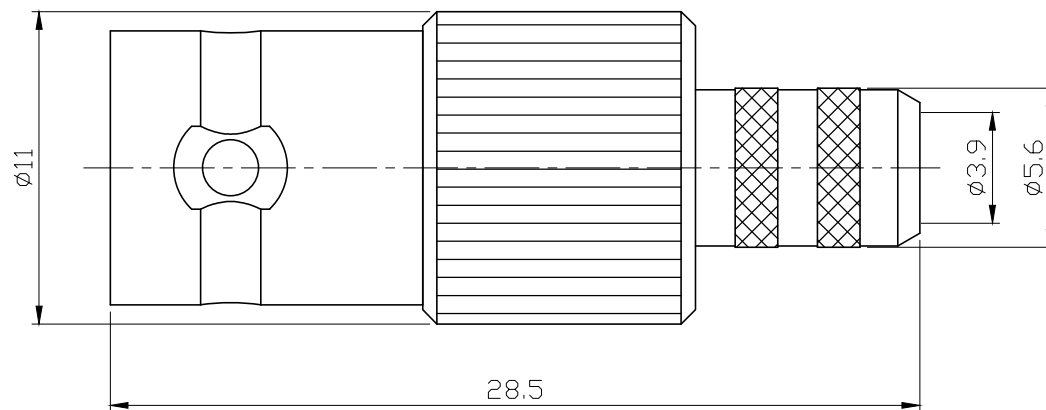


VSWR 1.25 : 1 UP TO 3GHz

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS.
2. P.BRONZE.
3. TIN-ZINC-COPPER-ALLOY PL. 100 MIN.
OVER COPPER PL. 50 MIN.
4. GOLD PL. 4 MIN. OVER NICKEL-PHOSPHORUS ALLOY
PL. 80 MIN. OVER COPPER PL. 20 MIN.

4. GOLD PL. 4 MIN. OVER NICKEL-PHOSPHORUS ALLOY PL. 80 MIN. OVER COPPER PL. 20 MIN.							DIMENSION ARE MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES (UNIT: MM) 0~0.5 = ±0.03 0.5~5 = ±0.05 5~10 = ±0.07 10~20 = ±0.10 20~30 = ±0.15 30~ = ±0.20 ANGLE ±5°	SCALE 4 / 1	ASSEMBLY REV. T	CONNECTOR REV. T	UNIT MM	JYE BAO CO., LTD. TAIPEI TAIWAN	
5	FERRULE	COPPER	NOTE 3	1	BNC3100-0059-9/W	C	APPROVED						TITLE BNC JACK CRIMP
4	CONTACT PIN	NOTE 2	NOTE 4	1	BNC81-L240-PEEK-4/NM	T	DATE						
3	INSULATOR	PEEK		1	BNC81-L240-PEEK-3	T	CHECKED		TESTER	DATE			
2	BODY	NOTE 1	NOTE 3	1	BNC8100-2A/W	B	DATE		DATE			DRAWING NO. BNC8100-L240/PEEK	
1	BODY	NOTE 1	NOTE 3	1	BNC8100-0059-1/W	C	DRAWING						
NO.	DESCRIPTION	MATERIAL	FINISH	QTY	PART NO.	REV	DATE						