




Adaptor jack/jack
BNC jack (female) / UHF jack (female)

AD-B2U25A/H4-H4

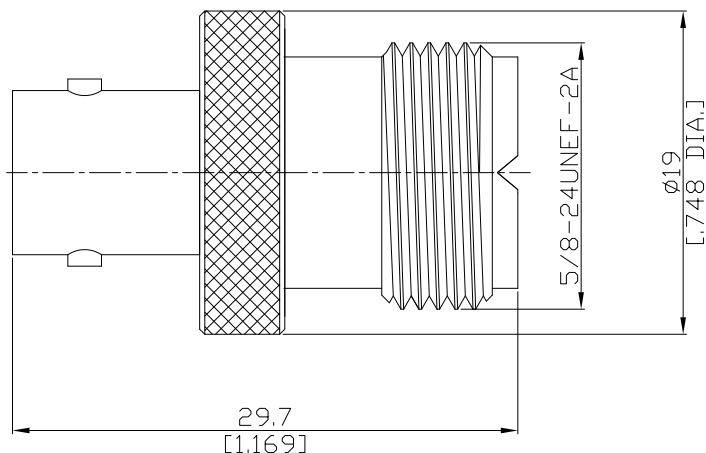

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

BNC side according to

IEC 60169-8; MIL-STD-348A/301

UHF side according to

IEC 60169-12

Electrical Data

Impedance

BNC (50 Ω); UHF (non-constant)

Frequency

DC to 300 MHz

Mechanical Data

Coupling mechanisms

BNC (Bayonet-lock); UHF (Screw-lock)

Weight

0.0157 kg

Environmental Data

Temperature range

-55°C to +149°C

RoHS

compliant

Material And Plating

Piece Parts (BNC)

Centre contact

Material

Phosphor Bronze

Plating

Gold plating(Nickel underplated)

Body

Brass

Copper-Tin-Zinc Alloy

Insulator

PTFE

Piece Parts (UHF)

Centre contact

Material

Phosphor Bronze

Plating

Gold plating(Nickel underplated)

Body

Brass

Copper-Tin-Zinc Alloy

Insulator

PTFE

Packing

Single or 100