


Connector SMB plug to SMB plug

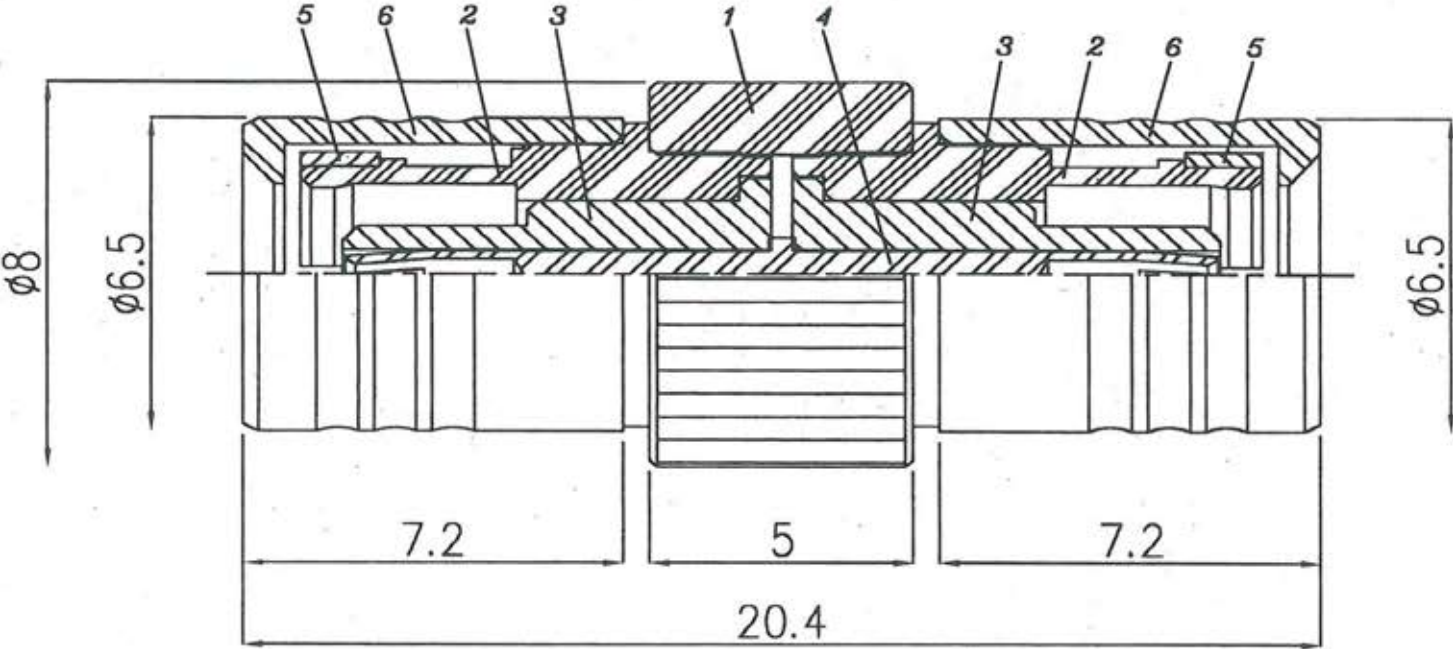

Unit in mm

Tolerances:

0-0.5mm ± 0.10mm	0.5-8mm ± 0.20mm
8-30mm ± 0.40mm	30-120mm ± 0.50mm

NO	DESCRIPTION	Q'TY	ITEM NO.	MATERIAL	PLATING
1	BODY 1	1	S1-311-ROHS	BRASS	GOLD 3-5µ"MIN.
2	BODY 2	2	S1-121-ROHS	BRASS	GOLD 3-5µ"MIN.
3	DIELECTRIC	2	T-040001	PTFE	-
4	CENTER PIN	1	S1-311-ROHS	BERYLLIUM COPPER	GOLD 10µ"MIN.
5	RETAINING RING	2	CW-04002	BERYLLIUM COPPER	-
6	SHELL	2	S-06001-ROHS	BRASS	GOLD 3-5µ"MIN.

All material in accordance with RoHS + REACH!

Prep.:	Date:	Rev.:	Date:	Remark:	Prep.:	Check.:	Item No.:
J.A.	20.03.15						SMB03
Check.:	Date:						Customer Item No.:
							73836
							EAN Bar Code:
Approv.:							All rights reserved
							Page 1 of 1