


TNC81EZ-L400 TNC Jack Crimp 50Ω

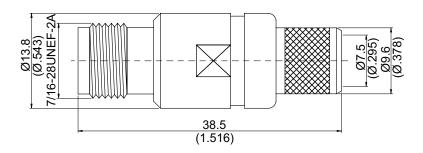

NOTE: Spring finger design, easy assembly

Parts	Material	Plating (Micro-inch)
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Barrel	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Phosphor Bronze	Gold 3 Over Nickel 50 Over Copper 50
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 21.47 g

Suitable Cables: JBY400, LMR400

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.



CABLE ASSEMBLY INSTRUCTION JYE BAO CO., LTD. TNC81EZ-L400 **TAIPEI TAIWAN R.O.C** В Α **BODY FERRULE DIAGRAM** ASSEMBLY INSTRUCTION 18 [.709] Step 1: STRIP AS SHOWN. 8.5 [.335] Step 2: SHARPEN CENTER CONDUCTOR TIP. Step 3: SLIDE FERRULE " B " OVER CABLE. NOTE: THE STRIPPED CABLE AND POINTED CENTER CONDUCTOR MUST BE STRAIGHT (180°). SHARPEN-Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR " A " IN PLACE. Step 5: SLIDE FERRULE "B" TOWARDS THE CONNECTOR "A" AND CRIMP.

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.