

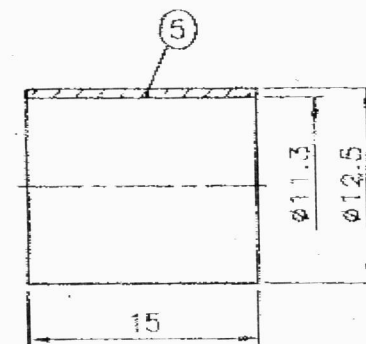
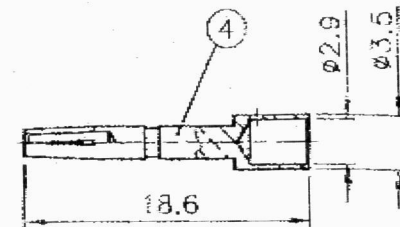
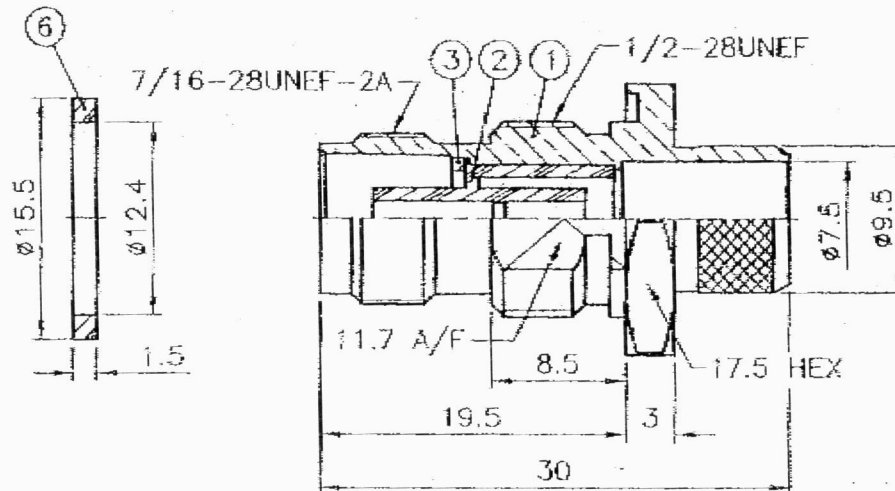


REVISIONS	
ISS. SYMBOL	DESCRIPTION \ DATE

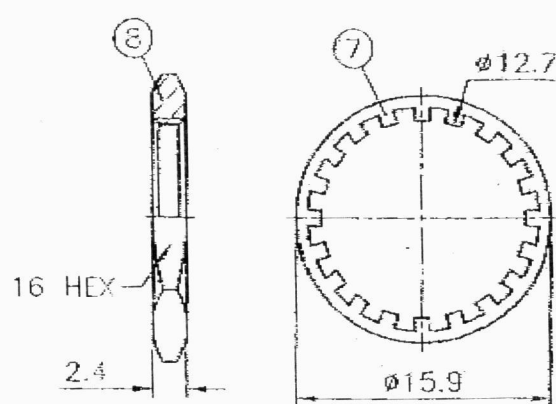


NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. BRASS JIS H 3250, C 2700

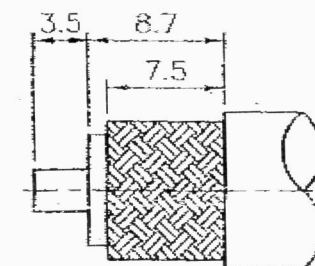


RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

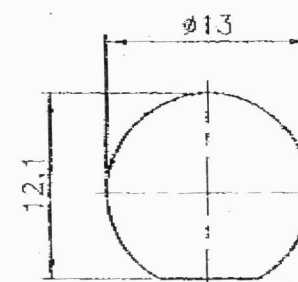

RECOMMENDED
MOUNTING HOLE
(建議安裝孔)

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
(套管壓著工具)
2. CONTACT PIN TO SOLDER
(中心針銲接)
3. MAX. PANEL THICKNESS=3
(最大板厚)

8	NUT	NOTE 1	NOTE 2	1	C05-004N	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差) 0.5~6 = ±0.2 >6~30 = ±0.4 >30~120 = ±0.6 >120~315 = ±1 >315~1000 = ±1.6 ANGLES(角度) = ±5°	PART NO.			TITLE TNC BULKHEAD CRIMP JACK (FOR B9913/LMR-400/B7810A/B)		
7	WASHER	SS41	NOTE 2	1	C03-C08N02		APPROVED 	DATE 08/27/04				
6	GASKET	RUBBER	ORANGE	1	C02-03E		CHECKED 	DATE 08/27/04		DRAWING NO. BJ-7417-16BNDG		
5	FERRULE	NOTE 4	NOTE 2	1	C06-035N			DATE 08/27/04				
4	CONTACT PIN	NOTE 1	NOTE 3	1	CP70-----CA			DATE 08/27/04				
3	LOCK RING	NOTE 1	NOTE 2	1	LR00-001-005NA		DRAWN 			FILE NO. Z:\ND\BJ\7417\16\BNDG		
2	INSULATOR	DELFIN	WHITE	1	C02-176		DATE 08/27/04					
1	BODY	NOTE 1	NOTE 2	1	BD74-----NA							
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	2/1	ISSUE	A1			