


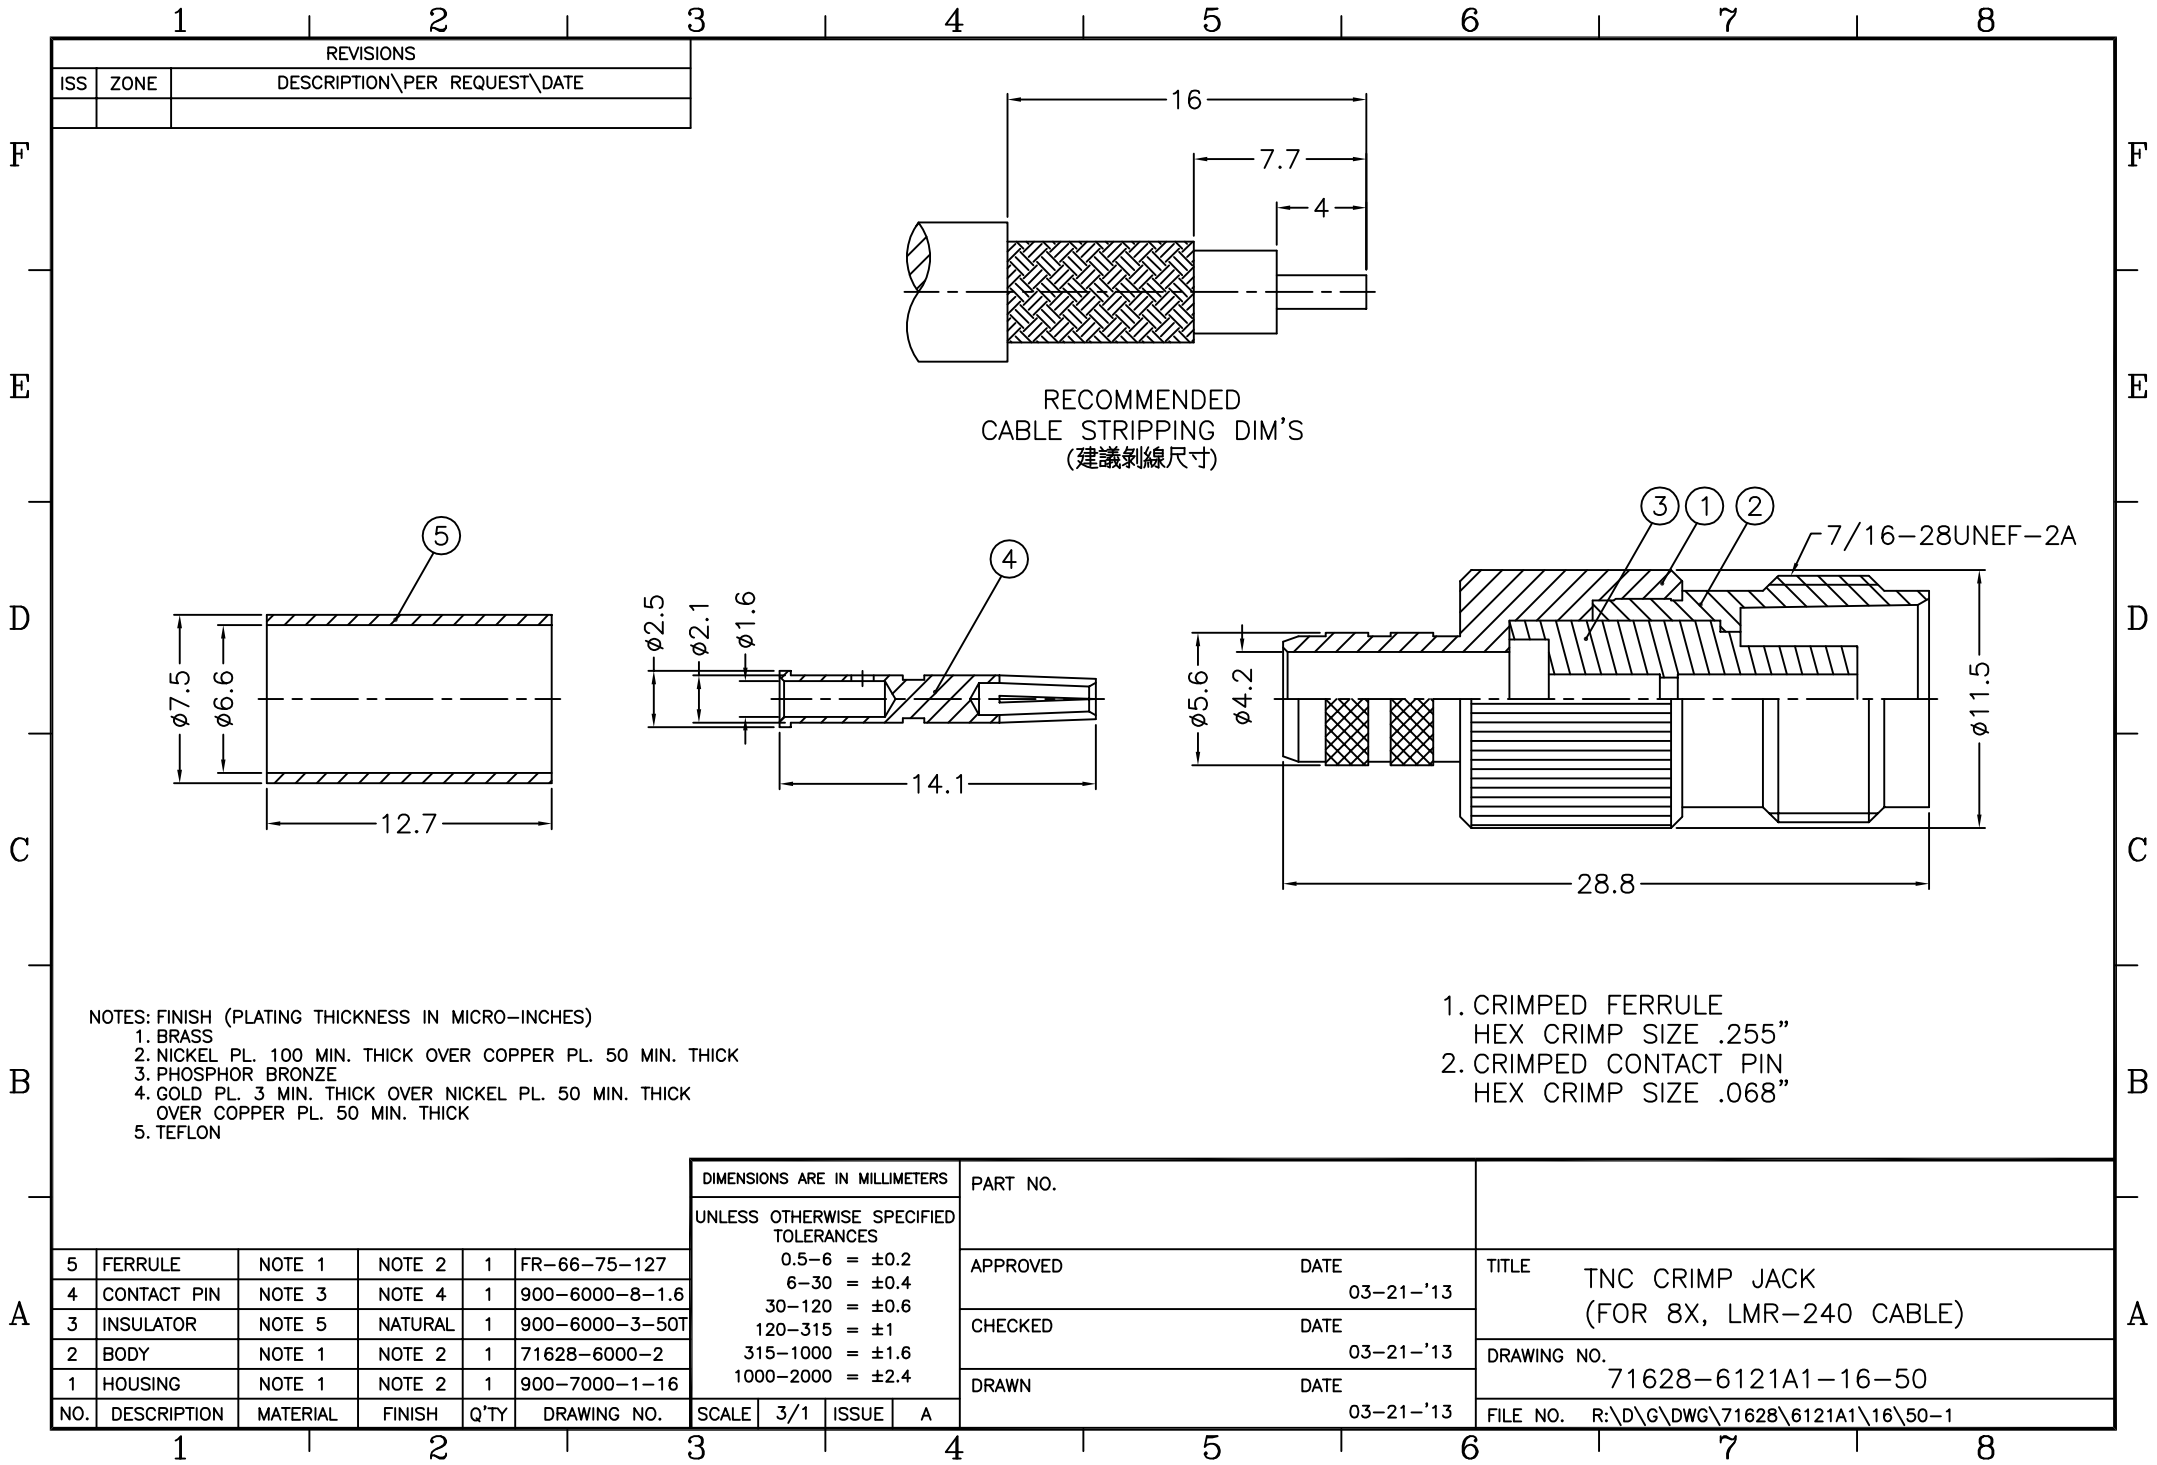

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1. BRASS
- 2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
- 3. PHOSPHOR BRONZE
- 4. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
- 5. TEFLON

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

						DIMENSIONS ARE IN MILLIMETERS				PART NO.			
						UNLESS OTHERWISE SPECIFIED TOLERANCES				APPROVED		DATE	TITLE TNC CRIMP JACK (FOR 8X, LMR-240 CABLE)
						0.5-6 = ±0.2				CHECKED		DATE	
						6-30 = ±0.4				DRAWN		DATE	
						30-120 = ±0.6						03-21-'13	
						120-315 = ±1						03-21-'13	DRAWING NO. 71628-6121A1-16-50
						315-1000 = ±1.6						03-21-'13	FILE NO. R:\D\G\DWG\71628\6121A1\16\50-1
						1000-2000 = ±2.4							
5	FERRULE	NOTE 1	NOTE 2	1	FR-66-75-127								
4	CONTACT PIN	NOTE 3	NOTE 4	1	900-6000-8-1.6								
3	INSULATOR	NOTE 5	NATURAL	1	900-6000-3-50T								
2	BODY	NOTE 1	NOTE 2	1	71628-6000-2								
1	HOUSING	NOTE 1	NOTE 2	1	900-7000-1-16								
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	A				