

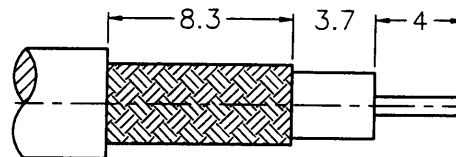
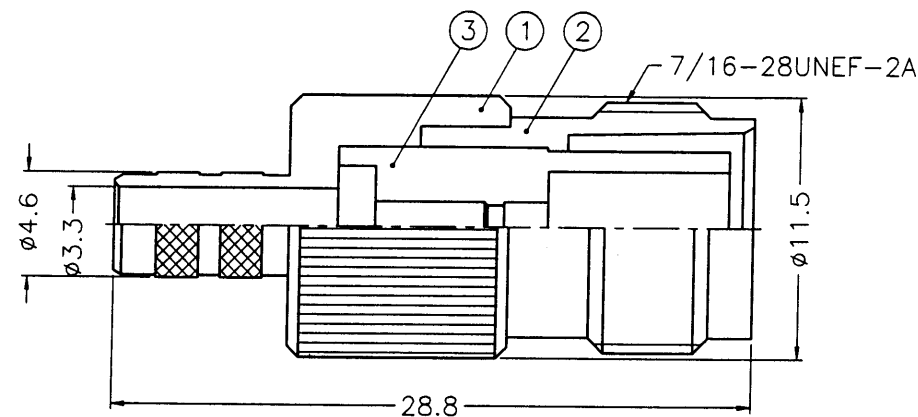


業務部

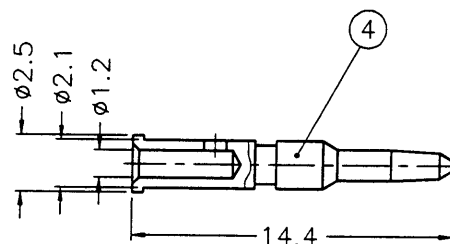

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)


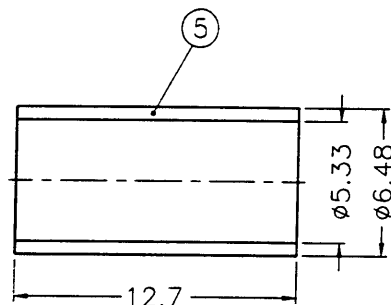


NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468



1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

5 FERRULE COOPER NOTE 2 1 FR-648/533X 127C						DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				PART NO.		Amphenol – Kai Jack TAINAN TAIWAN	
4 CCNTACT PIN NOTE 1 NOTE 3 1 RT6121A1-4-25/ 12													
3 INSULATOR NOTE 4 NATURAL 1 RT6121A1-3T-50						APPROVED  DATE 03-13-01'				TITLE TNC REVERSE POLARITY CRIMP JACK			
2 BODY NOTE 1 NOTE 2 1 RT6421G1-2						CHECKED  DATE 03-13-01'							
1 HOUSING NOTE 1 NOTE 2 1 B70000-1-46/33						DRAWN  DATE 03-13-01'				DRAWING NO. KJ-RT6121A1-NT3G-LMR200-50			
NO. DESCRIPTION MATERIAL FINISH Q'TY DRAWING NO.						SCALE	3/1	ISSUE	A	FILE NO. F:\DWG\RT\6121A1\L200-50\NT3G			

RD8DR11817