

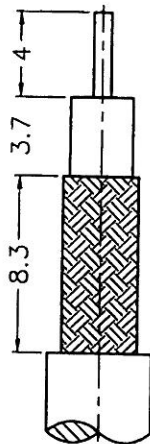
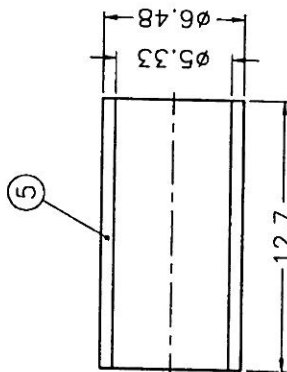


業務部

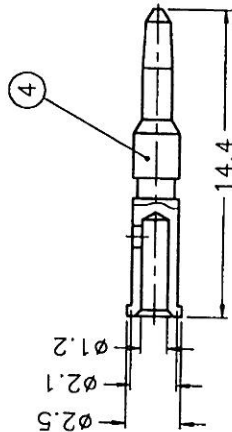

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

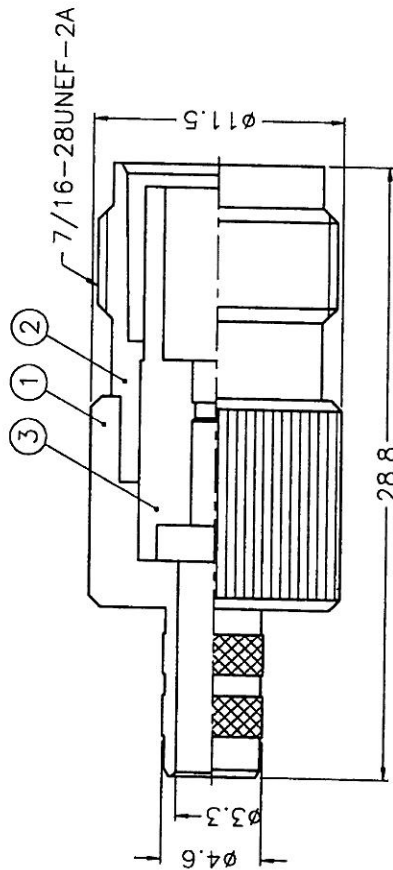

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"



NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468

Amphenol - Kai Jack

TAINAN TAIWAN

PART NO.		TITLE	
FR-648/533X 127C		TNC REVERSE POLARITY CRIMP JACK	
RT6121A1-4-25/ 12		DRAWING NO.	
RT6121A1-3T-50		KJ-RT6121A1-NT3G-LMR200-50	
RT6421G1-2		FILE NO.	
B70000-1-46/33		F:\DWG\RT\6121A1\L200-50\NT3G	
DIMENSIONS ARE IN MILLIMETERS		DATE	
UNLESS OTHERWISE SPECIFIED TOLERANCES		03-13-01	
0.5-6 = ±0.2		APPROVED	
6-30 = ±0.4		CHECKED	
30-120 = ±0.6		DRAWN	
120-315 = ±1		SCALE	
315-1000 = ±1.6		3/1	
1000-2000 = ±2.4		ISSUE	
		A	
NO. DESCRIPTION		MATERIAL	
1		COOPER	
2		NATURAL	
3		NOTE 1	
4		NOTE 2	
5		FINISH	
		QTY	
		DRAWING NO.	

PD887R11817