



REV.	DESCRIPTION	DATE	APPROVED

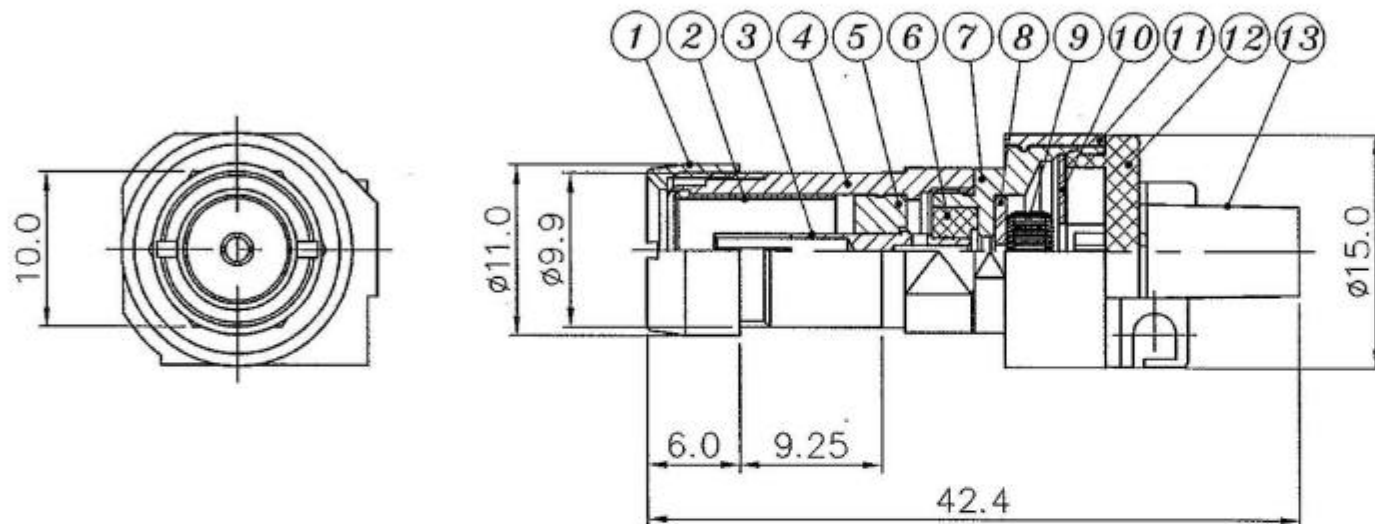

13	IDC SET	PBT+30%GF(UL94V-0)	1
12	BALUN REAR CAP	PBT(UL94V-0)	1
11	PLASTIC HOUSING	ABS(UL94V-0)	1
10	WASHER	BRASS FINISH NICKEL	1
9	BALUN CORE	1 : 1.26	1
8	INSULATOR WASHER	PBT+15%GF(UL94V-0)	1
7	BARREL	BRASS FINISH NICKEL	1
6	INSULATOR	TEFLON(400°C)	1
5	INSULATOR	TEFLON(400°C)	1
4	BODY	BRASS FINISH NICKEL	1
3	CENTER PIN	PHOSPHOR BRONZE FINISH GOLD	1
2	INNER CONTACT	PHOSPHOR BRONZE FINISH GOLD	1
1	NUT	BRASS FINISH NICKEL	1

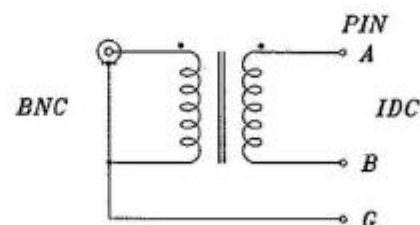


TECHNICAL SPECIFICATION:
 DATA RATES TO 2.048 Mbps
 75Ω COAX TO 120Ω TWISTED PAIR
 BI-DIRECTIONAL SIGNAL CONVERSION
 NO AC POWER OR BATTERIES NEEDED
 ULTRA-MINIATURE ENCLOSURE

NO	DESCRIPTION	MATERIAL	REMARK	Q'TY	DO NOT SCALE DWG.	UNIT	SCALE	SHEET	OF
----	-------------	----------	--------	------	-------------------	------	-------	-------	----

UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: FRACTIONS DECIMALS ANGLES X ±0.1 ±0.5° XY ±0.05		CONTRACT NO.	Dansk Microbølge Teknik ApS Energivej 13 - 9300 Sæby Danmark - www.dmtonline.dk	
MATERIAL	APPROVALS	DATE	CCITT G.703 BALUN M4 FEMALE TO KORNE IDC	
	DRAWN MAO	96.12.04		
	CHECKED mark	2007		
FINISH	ISSUED		SIZE A4	PSCH NO.
			DWG NO.	REV.
			SCALE 2 : 1	SHEET OF

P1:Off

▶2:511 Ref1 Port1 Log Mag 10.0 dB/ Ref 0.00 dB C

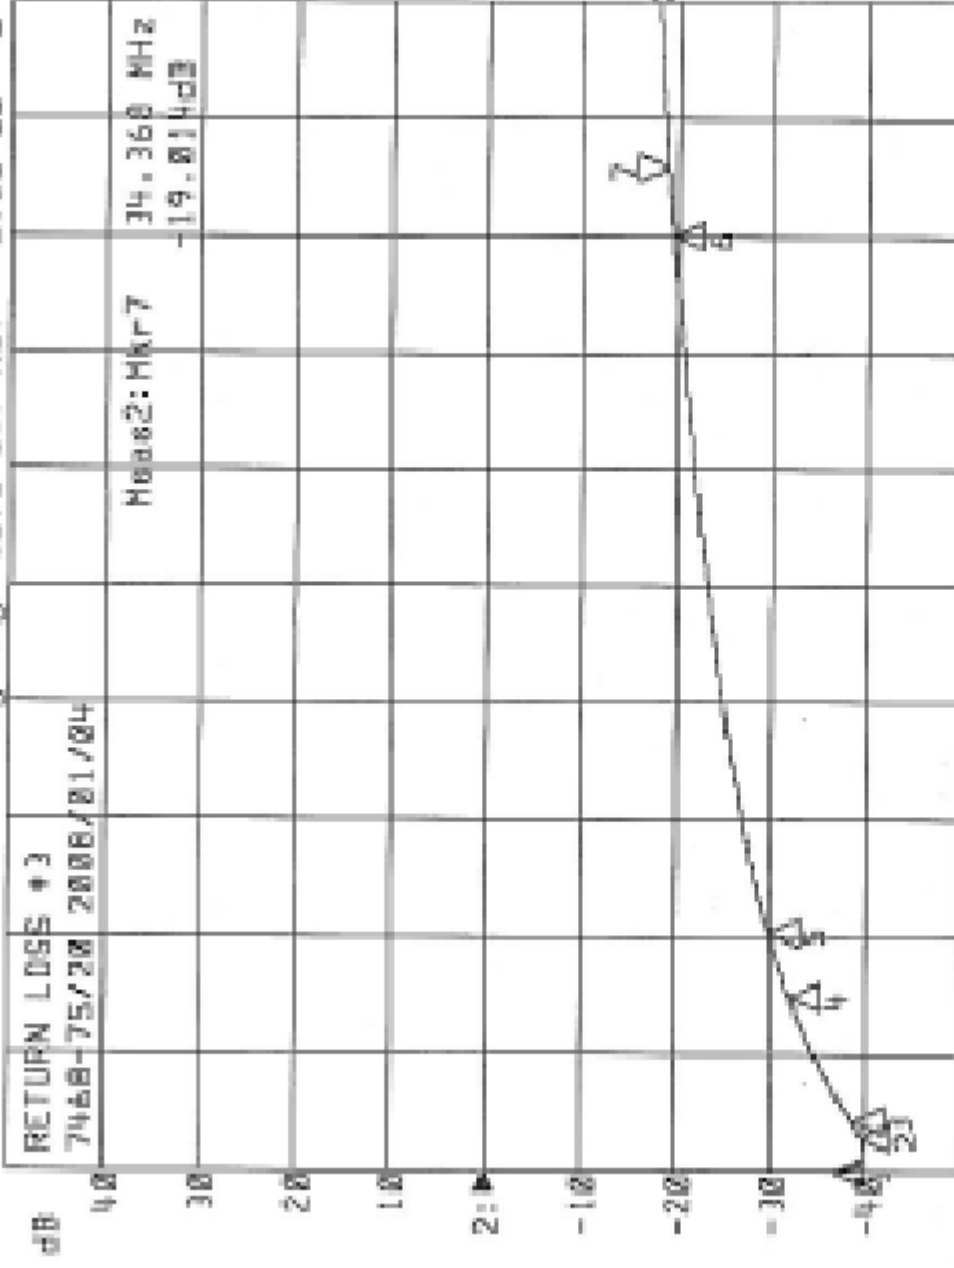

1: Mkr (MHz)	dB	2: Mkr (MHz)	dB
1:	0.3000	-36.650	
2:	1.5440	-39.549	
3:	2.8480	-38.639	
4:	6.3120	-31.933	
5:	8.4480	-29.786	
6:	32.8640	-19.546	
7:	34.3600	-19.814	