

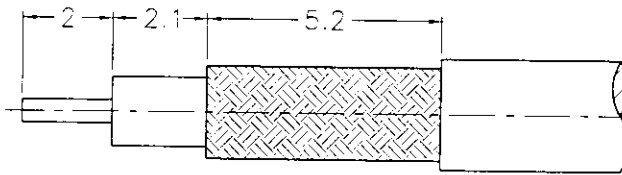
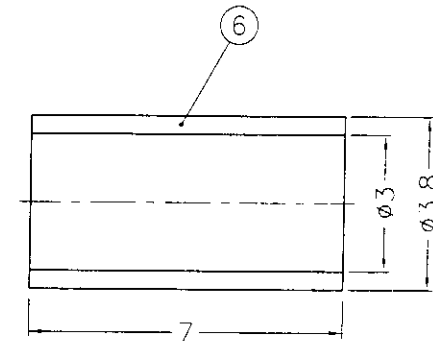


REVISIONS			
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE	
C	A-1	NO.2 AND NO.4 WERE CHANGE\RD-DM88060702C\06-07-99'	
	B-1	NO.5 WAS CHANGED\RD-DM88060701C\06-07-99'	

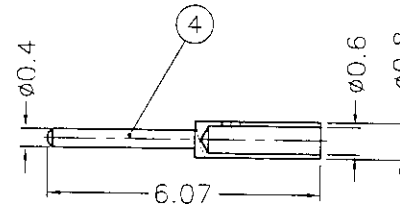

業務部

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

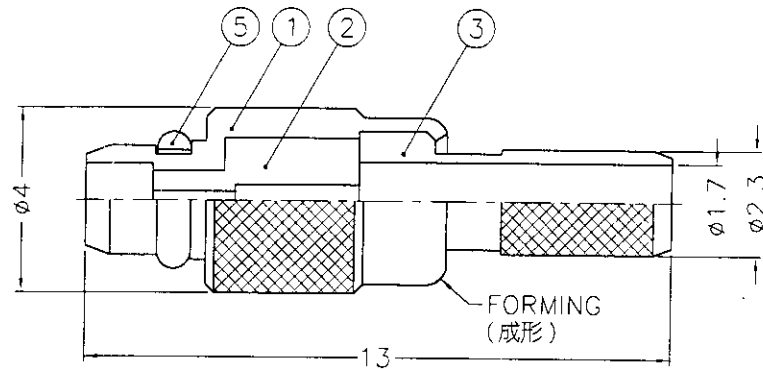

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. BERYLLIUM COPPER PER QQ-C-530
4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468



6	FERRULE	COPPER	NOTE 2	1	FR-38/3X7C
5	RETAINER RING	NOTE 3	NOTE 2	1	MMCX1121A1-5-C
4	CONTACT PIN	NOTE 1	NOTE 4	1	MMCX1121A1-4-08/06-B
3	BARREL	NOTE 1	NOTE 2	1	MMCX1121A1-3-23/17
2	INSULATOR	NOTE 5	NATURAL	1	MMCX1121A1-2T-5-B
1	BODY	NOTE 1	NOTE 2	1	MMCX1121A1-1-C
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	
SCALE	6/1	ISSUE	B

PART NO	
APPROVED	DATE 06-08-99'
CHECKED	DATE 06-08-99'
DRAWN	DATE 06-08-99'

KAI JACK INDUSTRIAL CO., LTD. TAINAN TAIWAN R.O.C.	
TITLE	MMCX CRIMP PLUG (FOR RG-174/U,188A/U,316/U)
DRAWING NO.	KJ-MMCX1121A1-3GT30G-316U-50
FILE NO.	F:\DWG\MMCX\1121A1\316U-50\3GT30G

84M60001