

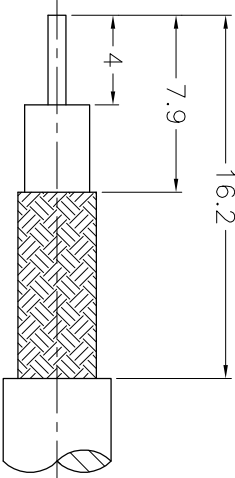
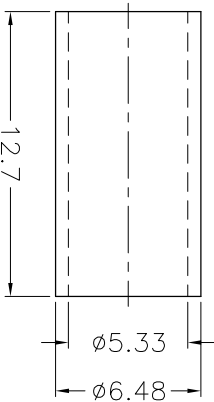


REVISIONS	
ISS	ZONE
DESCRIPTION\PER REQUEST\DATE	

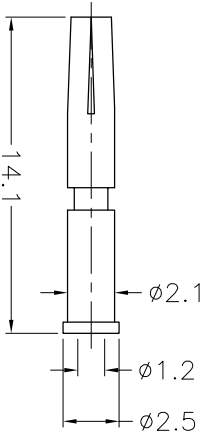

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

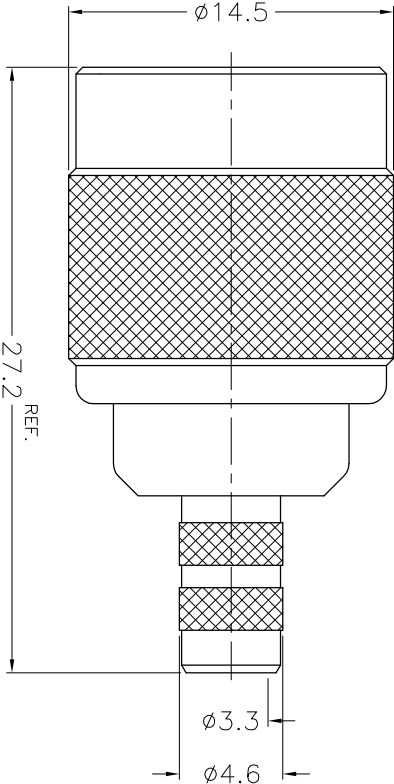

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
2. NICKEL P.L. 100 MIN. THICK OVER COPPER P.L. 50 MIN. THICK
3. PHOSPHOR BRONZE
4. GOLD P.L. 3 MIN. THICK OVER NICKEL P.L. 50 MIN. THICK
5. TEFLON

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .068"

10	FERRULE	COPPER	NOTE 2	1	FR-533-648-127C
9	CONTACT PIN	NOTE 3	NOTE 4	1	900-6000-8-1.2
8	SHELL	NOTE 1	NOTE 2	1	71628-1000-1
7	GASKET	RUBBER	RED	1	GS-80-105-15
6	RETAINER RING	NOTE 1	NOTE 2	1	900-1000-5
5	RING	DELFIN	NATURAL	1	71628-1000-6
4	WASHER	NOTE 1	NOTE 2	1	WS-90-128-08
3	BARREL	NOTE 1	NOTE 2	1	71628RP-1000-3-08
2	INSULATOR	NOTE 5	NATURAL	1	71628RP-1121A2-2-50T
1	BODY	NOTE 1	NOTE 2	1	71628RP-1000-1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
0.5-6 = ± 0.2
6-30 = ± 0.4
30-120 = ± 0.6
120-315 = ± 1
315-1000 = ± 1.6
1000-2000 = ± 2.4

PART NO.	
APPROVED	DATE
CHECKED	DATE
DRAWN	DATE

TITLE	
TNC REVERSE POLARITY CRIMP PLUG (FOR LMR-200 CABLE)	
DRAWING NO.	71628RP-1121A2-08-50
FILE NO.	R\D\G\DWG\71628\RP\1121A2\08\50