



TECHNICAL DATA SHEET

50 ohm Connectors for RF Cables

Kabelwerk

EUPEN AG

Rev.: 08/2020-09-25

cable

1/2

Connector 1/2" Hiflex for EC4-50-HF (5092)

FEATURES

- **Low reflection coefficient (up to 3 GHz)**
- **Low PIM level**
- **High contact force through inner contacts made in a high-strength copper alloy**
- **Watertight (IP67/IP68)**
- **Corrosion resistant**
- **Quick trimming tool for cable preparation**
- **One piece "screw on and tighten it"**



NF50B12X



716MB12X

The connectors are designed according the standard interfaces as N, 4.3-10 or DIN 7-16. Contact components are silver or trimetal plated to minimize insertion loss and passive intermodulation products; mechanical parts are nickel plated for heavy-duty handling and best corrosion resistance. Watertightness is achieved simultaneously on the outer conductor and on the jacket by using a special silicone gasket. This watertight solution allows the use of ours connectors in the toughest environmental conditions. For a cost effective, easy and reliable installation, special trimming tools are recommended.

SPECIFICATIONS

Connector type	N-male	N-female	4.3-10 male	7-16 male	7-16 female
Electrical specifications					
• Nominal impedance [Ω]	50				
• Reflection coefficient @ 3 GHz	≥ 34 dB				
• Insulation resistance [GΩ]	≥ 5			≥ 10	
• Test voltage (at sea level) [kV rms, 50Hz]	2.5			4*	
• Working voltage (at sea level) [kV rms,50Hz]	1			2.7	
• Max. peak power [kW]	10		15**		40
• Screening effectiveness up to 1 GHz [dB]	> 128				
• Contact resistance (outer contact) [mΩ]	≤ 1				
• Contact resistance (inner contact) [mΩ]	≤ 1				
• PIM ratio (2 x 20 W carrier) [dBc]	≤ -155 (Typical -163)				
Mechanical specifications					
• Torque of coupling mechanism [Nm]	8		5 to 8		30
• Tensile strength of coupling mechanism [N]	400		500		1000
• Cable retention [N]	> 400		> 500		> 700
• Mechanical endurance (Nr of couplings)	≥ 500				
• Outer diameter [mm]	22	22	24	35	29
• Length [mm]	61	59	56	50	51
• Weight [g]	100	100	105	120	115
Environmental specifications					
• Temperature range	-40 °C to +85 °C (-40 °F to +185 °F)				
• Degree of protection	IP67/IP68 (mated connectors)				
• Climatic & moisture resistance test	acc. ANSI/SCTE 72 2002 R2007 (-40 °C / +60 °C @ 75% r.h.) for 2 weeks				
• Corrosion resistance test	acc. IEC 60068-2-11-Test Ka				
• Vibration test	acc. IEC 60068-2-6 (10 to 500 Hz @ 10 G)				
Materials					
• Externals parts	Brass with passivated silver or trimetal or nickel plating				
• Outer contact	Brass with passivated silver or trimetal plating				
• Inner contact	Passivated silver plated high-strength copper alloy and brass				
• Dielectric	TPX / PTFE				
• Gaskets	High quality silicone				
Cable dimensions [mm]					
• Inner conductor outer diameter	3.5 to 3.6				
• Outer conductor outer diameter	12 to 12.4				
• Jacket outer diameter	13 to 13.8				
Order codes					
• Connector type	NM50B12X	NF50B12X	43MB12X	716MB12X	716FB12X
• Special trimming tool	SPTC50B12X – Silver color				

* The 7-16 interface itself withstands a proof voltage of 4 kV rms, but the cable size limits the voltage at the end of the cable to a lower value (refer to the datasheet of the cable, where the peak voltage is given with a safety margin).

** ambient temperature 90°C max.



INSTALLATION INSTRUCTIONS

50 Ohm CONNECTORS

Kabelwerk

EUPEN AG

E1016-Rev04/2007-04-02

cable

1/2"X (1/2" HIFLEX) - STRAIGHT CONNECTORS




1/2"X	SPTC50B12X

	NF, NM	7/16M	7/16F
	2 x 19 mm	19 mm & 21 mm & 32 mm	19 mm & 21 mm



PREPARATION TOOL METHOD

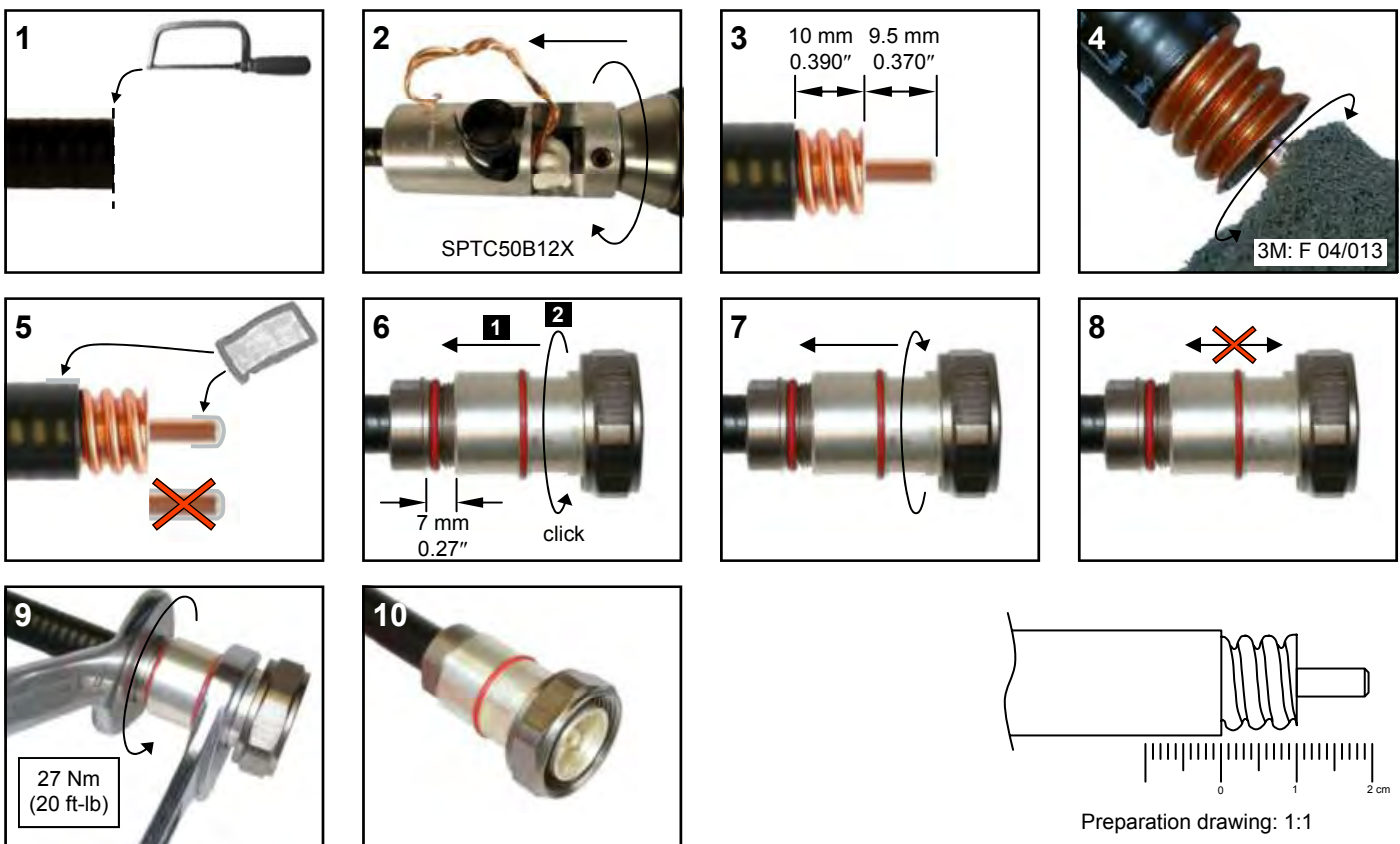

For any questions please contact KABELWERK EUPEN AG / for US Customer service call 1-800-419-5100

NOTICE:
KABELWERK EUPEN AG
disclaims any liability or
responsibility for the results of
improper or unsafe installation
practices.

AVIS:
KABELWERK EUPEN AG
décline toute responsabilité
en cas de non respect de
ces instructions.

WAARSCHUWING:
KABELWERK EUPEN AG
wijst elke verantwoordelijkheid
van de hand in geval
van het niet opvolgen van
deze aanbevelingen.

BEMERKUNG:
KABELWERK EUPEN AG
lehnt jede Verantwortung bei
Nichtbeachtung dieser
Instruktionen ab.

AVISO:
KABELWERK EUPEN AG
rehusa todas las responsabilidades
en caso de no
respetar las instrucciones.

注意:
本公司声明对于不恰当或不
安全的安装、检验、维修或拆
卸操作所导致的结果不负任何
义务和责任