



TECHNICAL DATA SHEET

50 ohm Connectors for RF Cables

Kabelwerk

EUPEN AG

Rev.: 05/2009-04-23

cable

Connector 1/2" for EC4-50 (5128)

FEATURES

- **Low reflection coefficient (up to 2.5 GHz)**
- **Low PIM level**
- **High contact force through Cu-Be inner contact**
- **Silver plated**
- **Watertight (IP67/IP68)**
- **Corrosion resistant**
- **Installation "fit on and tighten it"**
- **Sealant injection or o-ring sealing**



NF50A12



716FV12



716MAL12

The connectors are designed according to the standard interfaces as N or DIN 7/16. Contact components are silver plated to minimize insertion loss and passive intermodulation products; mechanical parts are nickel plated for heavy-duty handling and best corrosion resistance. The watertightness of our connectors is made using silicone o-rings or silicone sealant injection, filling up all interstices, to resist in the toughest environmental conditions. For a cost effective, easy and reliable installation, special trimming tools are recommended.

SPECIFICATIONS

Connector type	N-male	N-female	7-16 male	7-16 female	N-male right angle	7-16 male right angle
Electrical specifications						
• Nominal impedance [Ω]	50					
• Reflection coefficient @ 2.5 GHz	≤ 0.02			≤ 0.03		
• Insulation resistance [GΩ]	≥ 5		≥ 10		≥ 5	≥ 10
• Test voltage (at sea level) [KV rms, 50Hz]	2.5		4		2.5	4
• Working voltage (at sea level) [KV rms,50Hz]	1		2.7		1	2.7
• Screening effectiveness up to 1 GHz [dB]	> 128					
• Contact resistance (outer contact) [mΩ]	≤ 1					
• Contact resistance (inner contact) [mΩ]	≤ 1					
• PIM ratio (2x20 W carrier) [dBc]	≤ -155 (Typical -163)					
Mechanical specifications						
• Torque of coupling mechanism [Nm]	8		30		8	30
• Tensile strength of coupling mechanism [N]	400		1000		400	1000
• Cable retention [N]	> 500		> 1000		> 400	> 700
• Mechanical endurance (Nr of couplings)	≥ 500					
• Outer diameter [mm]	22	22	35	29	22	35
• Length [mm]	61	59	59	60	54 x 40.4	60 x 39.5
• Weight [g]	90	88	140	138	164	188
Environmental specifications						
• Temperature range	-40 °C to +85 (-40 °F to +185 °F)					
• Degree of protection	IP67/IP68 (mated connectors)					
Materials						
• Externals parts	Passivated silver plated or electroless nickel plated brass					
• Outer contact	Passivated silver plated brass					
• Inner contact	Passivated silver plated Cu-Be and brass					
• Dielectric	PTFE		TPX		TPX / PTFE	
• O-rings	High quality silicone					
Cable dimensions [mm]						
• Inner conductor outer diameter	4.75 to 4.85					
• Outer conductor outer diameter	13.6 to 13.9					
• Jacket outer diameter	15.5 to 16.5					
Order codes						
• Sealant injection connector type	NM50A12	NF50A12	716MA12	716FA12	NM50AL12	716MAL12
• O-ring connector type	NM50V12	NF50V12	716MV12	716FV12	NM50VL12	716MVL12
• Special trimming tool	SPTC50AV12 – Silver color					
• Special silicone sealant kit	SIL 744					



INSTALLATION INSTRUCTION

50 Ohm CONNECTORS

Kabelwerk **EUPEN** AG

E1018 Rev.06/2012-02-28

cable


1/2" - Straight & right angle connectors - O-Ring type



EC4-50 (5128) EA4-50 (5127)	SPTC50AV12






Please use cable preparation tools and refer to its instructions for use.

Follow the instruction process below only if these tools are not available.

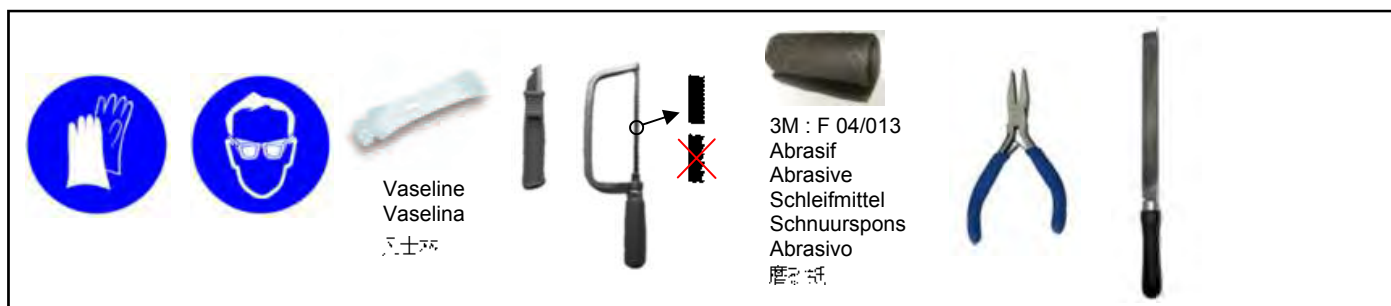

	NF, NM	NM50VL12	7/16M	7/16MVL12	7/16F	EIA
	2 x 19 mm	19 mm & 23 mm	19 mm & 24 mm & 32 mm	19 mm & 24 mm & 32 mm	19 mm & 24 mm	2 x 10 mm & 19 mm & 24 mm

MANUAL METHOD

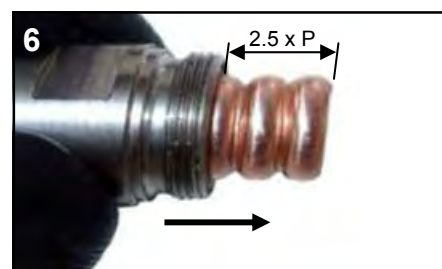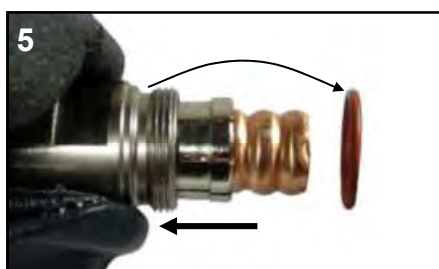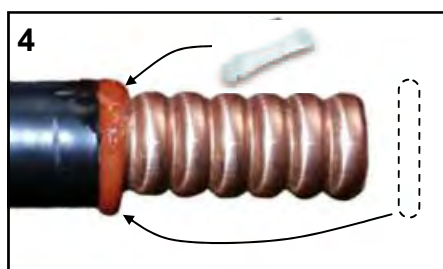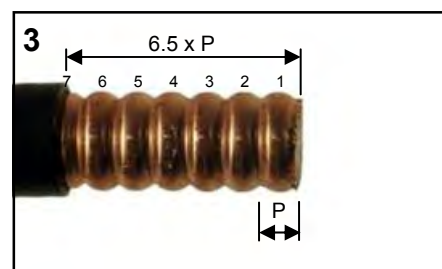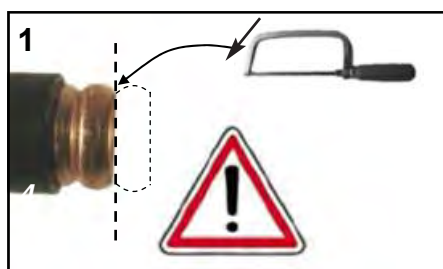



INSTALLATION INSTRUCTION

50 Ohm CONNECTORS






Kabelwerk

EUPEN AG

E1018 Rev.06/2012-02-28

cable

1/2" - Straight & right angle connectors - O-Ring type

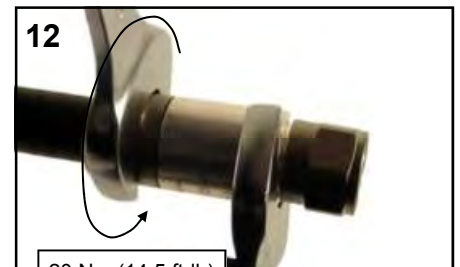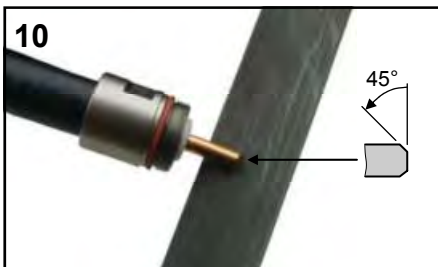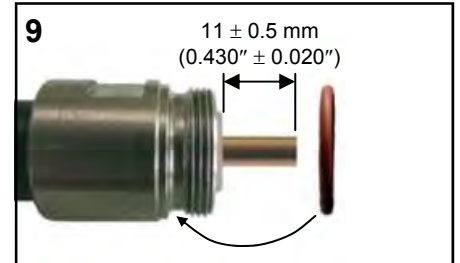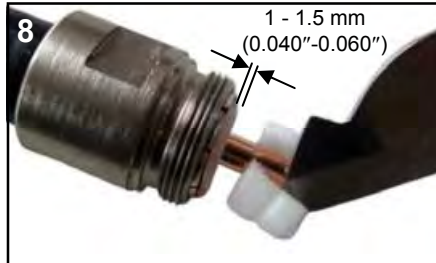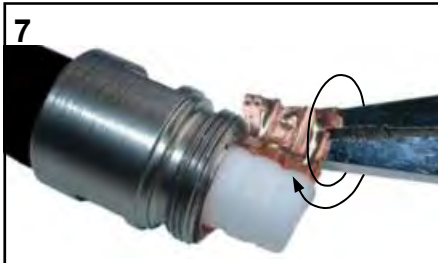

For the installation on cable 5127/EA4-50, an additional sealing is mandatory. It can be achieved with one of the following methods:

Weatherproofing Tape Kit



Eucaseal



Cold Shrink Tube



For any questions please contact KABELWERK EUPEN AG / for US Customer service call 1-800-419-5100

NOTICE:
KABELWERK EUPEN AG
disclaims any liability or
responsibility for the results
of improper or unsafe installa-
tion practices.

AVIS:
KABELWERK EUPEN AG
décline toute responsabilité
en cas de non respect de
ces instructions.

WAARSCHUWING:
KABELWERK EUPEN AG
wijst elke verantwoordelijk-
heid van de hand in geval
van het niet opvolgen van
deze aanbevelingen.

BEMERKUNG:
KABELWERK EUPEN AG
lehnt jede Verantwortung bei
Nichtbeachtung dieser
Instruktionen ab.

AVISO:
KABELWERK EUPEN AG
rehusa todas las responsabi-
lidades en caso de no
respetar las instrucciones.

注意:
本公司声明对于不恰当或不
安全的安装、检验、维修或拆
卸操作所导致的后果不负任
何义务和责任