

3 dBd Omnidirectional Base Station and Marine Antenna
for the 5700 MHz Band

DESCRIPTION

- Vertically polarized, omnidirectional base station and marine antenna.
- Approximately 3 dBd gain.
- Simple mounting using the 1" revolving nut system.
- Wide variety of accessory mounting brackets available.
- Large bandwidth with respect to both SWR and gain.
- Highly suitable for duplex operation with large spacing between the TX and the RX frequencies.
- The antenna element is sealed in a high-quality, conical glass fibre tube.
- All metal parts in the antenna are DC-grounded to reduce the noise caused by atmospherical discharge. Consequently, the antenna shows a DC-short across the coaxial cable.
- The CXL 5700-3 is a vibration-proof, lightweight, slim-line, corrosion resistant, modern style base station and marine antenna.

SPECIFICATIONS

Electrical	
Model	CXL 5700-3
Frequency	5450 - 5900 MHz
Antenna Type	Collinear, broad-band
3 dB Beamwidth, H-Plane	Omnidirectional
Polarisation	Vertical
3 dB Beamwidth, E-Plane	30 °
Impedance	50 Ω
Gain	3 dBd (5.2 dBi)
VSWR	< 1.5:1
Maximum Input Power	100 W
Antistatic Protection	All metal parts DC-grounded (Connector shows a DC-short)
HCM Code(s)	
Mechanical	
Wind Area	0.005 sq. m / 0.05 sq. ft
Connection(s)	N(f)
Materials	Shroud: Polyurethane-coated glass fibre Mounting bracket: Chromed brass
Colour	White (RAL 9003)
Height	230 mm / 9.06 in.
Wind Load	6 N (160km/h)
Dia. At Top End	14 mm / 0.55 in.
Weight	0.2 kg / 0.44 lb
Dia. At Bottom End	16 mm / 0.63 in.
Mounting	On 1" RG (G1" - 11) threaded water pipe or on optional mounting brackets (see accessories)
Environmental	
Operating Temperature Range	-30 °C to +70 °C



ORDERING

Type	Product No.
CXL 5700-3	100000199




DIAGRAM

ACCESSORIES (to be ordered separately) TYPICAL GAIN AND SWR CURVES

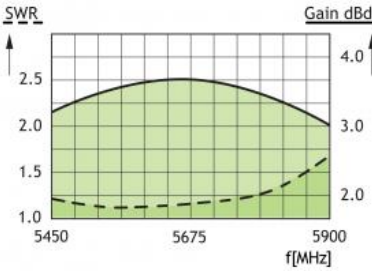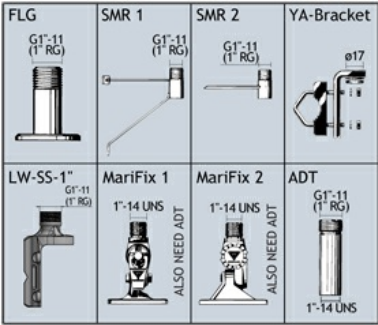

TYPICAL RADIATION PATTERN (E-PLANE)

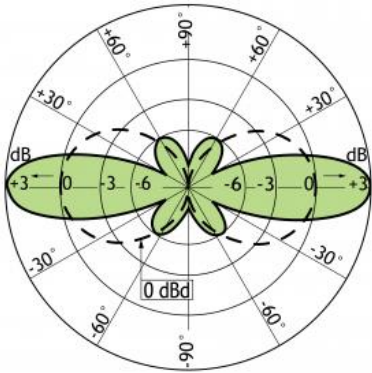

TYPICAL RADIATION PATTERN (H-PLANE)

