

Unity Gain, Broad-banded, Omnidirectional Base Station
Antenna for the 80 MHz Band

DESCRIPTION

- CXL 4-2C/... is a 0 dBd gain, omnidirectional rod-type base station antenna for the 80 MHz band.
- The 80 MHz-band is covered in 4 frequency segments: 66 - 80 MHz, 70 - 84 MHz, 74 - 88 MHz and 88 - 108 MHz.
- CXL 4-2C/... is designed for fixation on supporting tubes with outer diameter between 27 mm and 65 mm.
- The construction of the mount makes it possible to lead the cable either inside or along the outside of the mast tube.
- A glass fibre tube completely encloses the carefully designed radiating element to ensure long dependable service in all climates.
- Atmospheric discharges are immediately led to ground as all metal parts are DC-connected. Consequently, the antenna shows a DC-short across the coaxial cable.
- This antenna is used where reliability is of utmost importance. A long lifetime has been taken into consideration when designing this antenna – it is sturdy and strong.



ORDERING

Type	Product No.	Frequency
CXL 4-2C/l	100000059	66 - 80 MHz
CXL 4-2C/m	100000058	70 - 84 MHz
CXL 4-2C/h	100000057	74 - 88 MHz
CXL 4-2C/hh	100000470	88 - 108 MHz


SPECIFICATIONS

Electrical	
Model	CXL 4-2C/...
Frequency	Models within 66 - 108 MHz (see model survey)
Antenna Type	Coaxial dipole, broad-banded
3 dB Beamwidth, H-Plane	Omnidirectional
Polarisation	Vertical
Pattern Type	Omnidirectional
3 dB Beamwidth, E-Plane	80 °
Impedance	50 Ω
Gain	0 dBd (2.2 dBi)
VSWR	< 1.6:1
Maximum Input Power	600 W
Bandwidth	14 - 20 MHz dep. of model
Antistatic Protection	All metal parts DC-grounded (Connector shows a DC-short)
HCM Code(s)	


Mechanical	
Wind Area	0.15 sq. m / 1.61 sq. ft
Connection(s)	N(f)
Materials	Radiating part: Glass fibre, polyurethane-lacquered Mast clamp : Seawater-resistant aluminium, epoxy-coated
Colour	White (RAL 9003)
Height	3100 mm / 122.05 in.
Wind Load	190 N (160km/h)
Weight	4.5 kg / 9.92 lb
Mounting	On 27 - 65 mm dia. mast tube

DIAGRAM


TYPICAL GAIN AND SWR CURVES

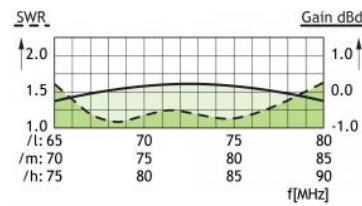


TYPICAL GAIN AND SWR CURVES

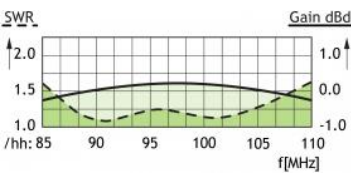

TYPICAL RADIATION PATTERN (E-PLANE)

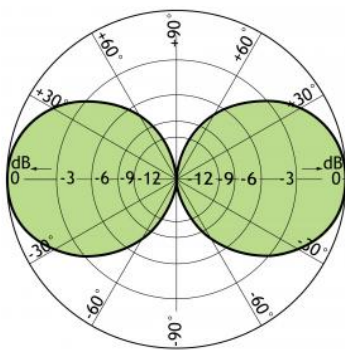

TYPICAL RADIATION PATTERN (H-PLANE)

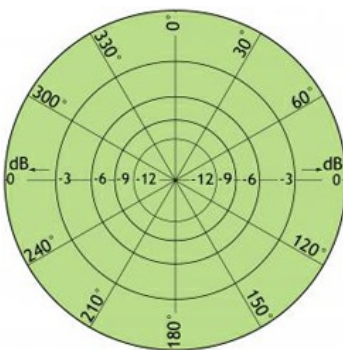

MULTI-PURPOSE MOUNTING BRACKET

