

Deck Feed-Through for Coaxial Cable with Connector

DESCRIPTION

- This deck feed-through is mainly designed for use on pleasure crafts, yachts etc. where the mast is dismantled when the vessel is hoisted on land for service or for winter storage.
- If the vessel carries a masthead-mounted antenna with the downlead cable permanently fixed to the mast, it is possible, using the CFT 259, to withdraw the cable with connector from under deck, up through the feed-through without dismantling the connector.
- The connector can be a PL 259 (UHF) connector or any other connector with an outside diameter less than 20.5 mm (e.g. type "N"). A blanking cap to cover the feed-through when the cable has been removed is enclosed.

SPECIFICATIONS

Electrical	
Application	Deck feed-through for coaxial cable with connector
Mechanical	
Materials	Chromed brass Environment-proof plastics
Cable	RG 58 C/U or RG 213/U
Max. Connector Dia.	20.5 mm
Weight	0.08 kg / 0.18 lb
Surface Treatment	Triple chrome plating
Environmental	
Operating Temperature Range	-30 °C to +70 °C

ORDERING

Type	Product No.
CFT 259	110000029

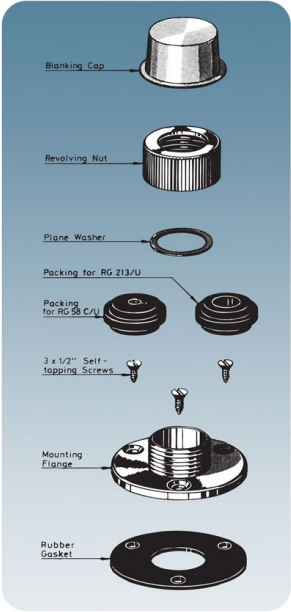


DIAGRAM
INSTALLATION DETAILS

