

Miniature Receiver Multicoupler series for the VHF and low UHF band 30 - 960 MHz

DESCRIPTION

- Active wideband receiver multicoupler for the VHF band and the low part of the UHF band with one input and two or four outputs.
- For use where a number of receivers have to share the same antenna.
- Wide frequency range. Covers 30 - 960 MHz.
- Other versions available:
 - HPRS-S : 10 kHz - 108 MHz
 - HPRS-U : 690 MHz - 2.7 GHz
- High-dynamic range amplifier built in to compensate for loss in the multicoupler network.
- High OIP2 and OIP3.
- Low amplifier noise figure.
- High isolation between receiver outputs.
- 12 V operating voltage (24 V as option).
- DC supply on solder terminal or on 2.5 mm barrel DC connector.
- Coated with black vinyl to prevent corrosion.
- Available with N-, TNC- or BNC-female connector types.



ORDERING


Type	Product No.	Description
HPRS2-N(f)	210000201	OUTPUTS: 2
HPRS2-TNC(f)	210001958	OUTPUTS: 2
HPRS2-BNC(f)	210000319	OUTPUTS: 2
HPRS4-N(f)	210000188	OUTPUTS: 4
HPRS4-TNC(f)	210001959	OUTPUTS: 4
HPRS4-BNC(f)	210000321	OUTPUTS: 4
ADAPTOR AC/DC 12V EU	240000040	
ADAPTOR AC/DC 12V UK	240000041	

SPECIFICATIONS


Electrical	
Model	HPRS
Gain (Input To All Outputs)	-16 dB +3 dB @ 400 MHz, adjustable
Frequency	30 - 960 MHz
Noise Figure	< 3.5 dB @ 400 MHz
OIP3	> +33 dBm @ 12.0 V and max. gain
Impedance	50 Ω
P1dB	> +20 dBm @ 12.0 V and max. gain
OIP2	> +65 dBm @ 12.0 V and max. gain
Isolation Between Outputs	30 - 50 MHz > 18 dB 50 - 800 MHz > 20 dB 800 - 960 MHz > 18 dB
Power Supply	10.2 to 13.8 V / max. 450 mA
Input VSWR	< 2.5:1 typically < 2.0:1
Input-Output Isolation	> 23 dB
Output VSWR	Max. 2.0:1 typically < 1.5:1
No. Of Channels	4
Mechanical	
Connection(s)	N, SMA, TNC or BNC female
Dimensions	129 x 152 x 35 mm / 5.08 x 5.98 x 1.38" (incl. connectors and flanges)
Weight	0.36 kg / 0.79 lb
Mounting	4 mm dia. (four holes)
Environmental	
Operating Temperature Range	-30 °C to +50 °C
Ingress Protection	IP31

ADDITIONAL DATA


DC POWER SUPPLY CONNECTION

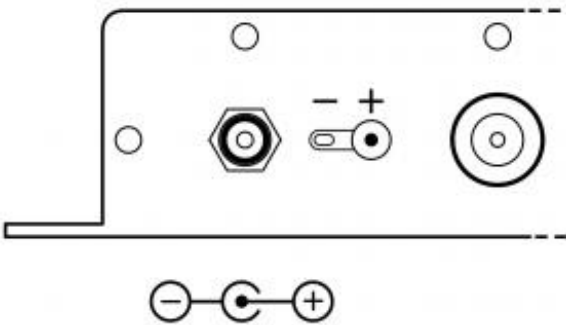

TYPICAL GAIN AND SWR CURVES

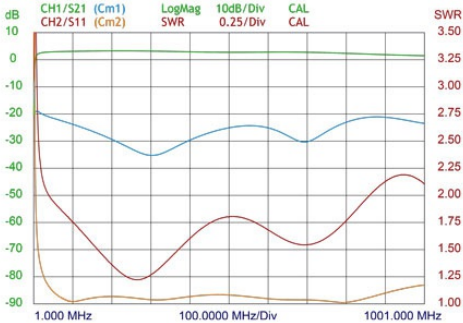

MOUNTING DETAILS

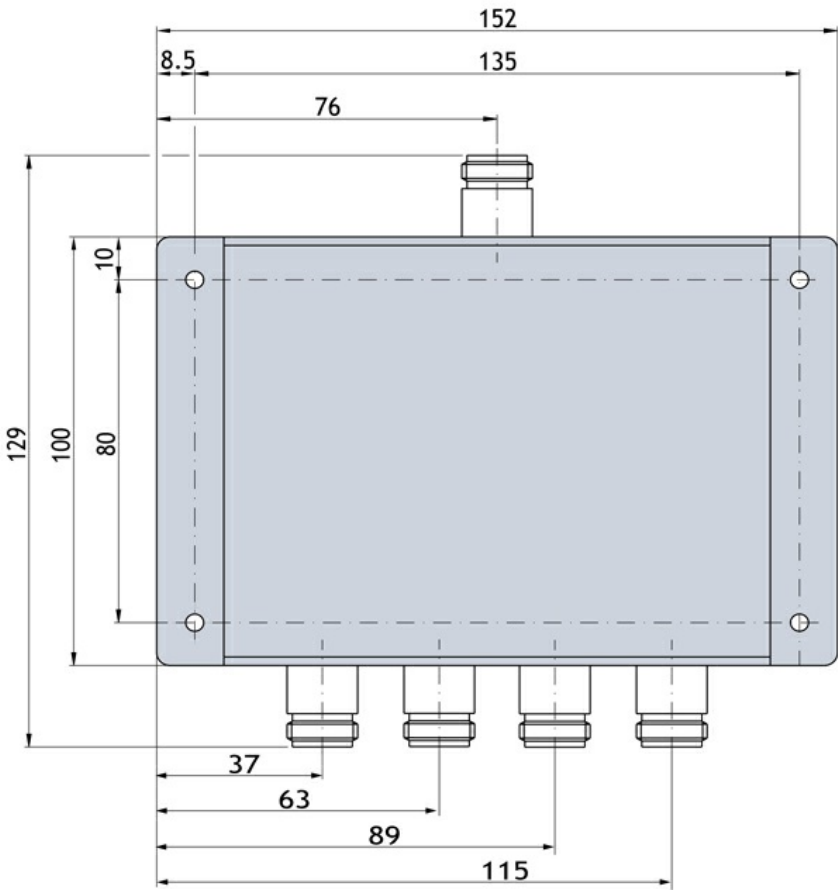

EU DECLARATION OF CONFORMITY

Hereby Amphenol Procom declare that the product type HPRS is in compliance with EU Directive 2014/53/EU. The full text of the EU Declaration of Conformity is available at:

</images/shop/catalog/pdf-for-catalogues/Declaration-of-Conformity-HPRS.pdf>

ADAPTOR AC/DC 12V EU - ADAPTOR AC/DC 12V UK

