


Data Sheet

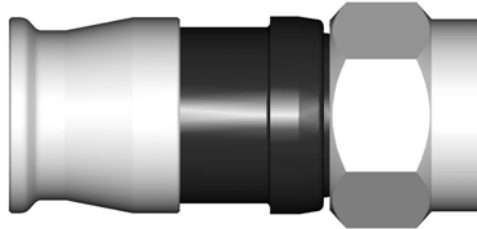

No.	72000100
Connector Type:	TELESTE: FCC170 EX59-39/79

Band Width:	5 MHz – 2,2GHz	Temperature	
Impedance:	75 Ohm	Installing:	-5 to +50 °C
Amp. Rating:	3 A	Operating:	-40 to +80 °C
Shielding:	>114db @ 900 MHz	Sealing Test:	IP X8

Return Loss: @ MHz, Better Than		Insertion Loss: @ MHz, Better Than	
500:	-45 dB	500:	-0,07 db
860:	-36 dB	860:	-0,09 db
1000:	-34 dB	1000:	-0,12 db
1750:	-29 dB	1750:	-0,19 db

Pull Strength:		Dielectric Strength:	2 Kv
Total:	14 kg	Insulation Resistance:	(@500V): >29.99Gohm
Inner Conductor:	X kg	Inner Conductor:	Resistance max. @ 1A DC: 57 mOhm
Jacket:	X kg		

Material and Plating		
Body:	Brass	NiSn (NiTin)
Inner Cond.		
O'rings	EPDM	
Insulators		