



LP-STRL-N Series

- *Long Term Evolution (LTE) and 700 MHz Public Safety Applications*
- *Excellent PIM Performance*
- *Outstanding IL/RL Characteristics*
- *DC Blocked for Superior Surge Performance*
- *High Surge Current/Power Rated*
- *Broadband Multi-Strike Design*
- *Fully Weatherized Housing*
- *Solid Brass Construction for Durability and Long Life*



**100% PIM
Tested**


Lightning and Surge Protection for The 21st Century™

The **Times Protect™** LP-STRL-N high performance series is an exceptional DC blocked design for outstanding surge performance, capable of withstanding multiple lightning strikes. The operating band width of 680MHz-2200MHz makes the LP-STRL-N series suitable for a broad range of applications. This design covers the 700MHz Band for Public Safety Services as well as LTE (Long Term Evolution) applications. With its excellent passive intermodulation performance, outstanding RF performance over the entire operating band and superior power handling capability, the LP-STRL-N product family is unequalled. Its fully weatherized housing meeting IP67 standard allows for outdoor as well as indoor installation.


LP-STRL-N Series:

- LP-STRL-NFF
N Female connectors on surge and protected sides
- LP-STRL-NMP
N Male connector on protected side with N Female connector on surge side
- LP-STRL-NMS
N Male connector on surge side with N Female connector on protected side


Times-Protect™

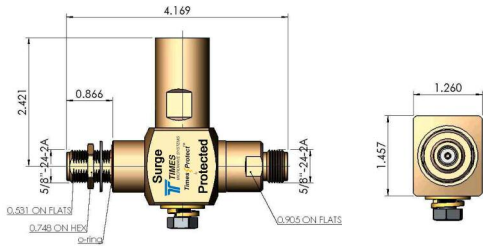

- LP-STRL-NFF
680-2200MHz DC Blocked N Type F/F

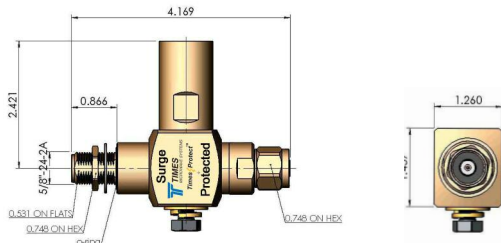

- LP-STRL-NMP
680-2200MHz DC Blocked N Type M on Protected

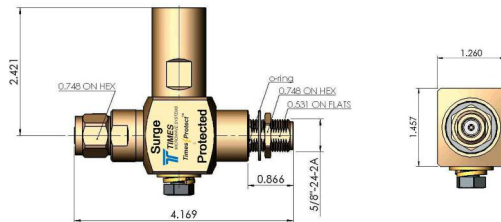

- LP-STRL-NMS
680-2200MHz DC Blocked N Type M on Surge

*All dimensions shown in inches

Electrical Specifications

Impedance	50 Ω
Frequency Range	680-2200 MHz
VSWR/Return Loss	< 1.13:1 / <-24dB (680-700MHz) < 1.1:1 / <-26dB (700-2200MHz)
Insertion Loss	< 0.1dB
Average Power	500 Watts
PIM	<-160dBc
Maximum Surge Current	50kA (8x20 μ s wave-form)
Residual Pulse Voltage	< 100V (50kA 8x20 μ s wave-form)
Residual Pulse Voltage	< 1V (4kV/2kA 1.2x50/8x20 μ s wave-form)
Energy Throughput Rating	< 1nJ (4kV/2kA 1.2x50/8x20 μ s wave-form)
Protection Circuit	DC Blocked


Mechanical / Environmental Specifications

Temp Range Storage/Operating	-40°C - +85°C
Weatherization	IEC 60068 55/155/56 & IP67
Thermal Shock	US MIL-STD 202, Meth.107,Cond.B
Vibration	US MIL-STD 202, Meth.204,Cond.B
Shock	US MIL-STD 202, Meth.213,Cond.I
RoHS Compliant	Yes
Wear/Mating Cycles	500 minimum
Recommended Coupling Nut Torque	7 to 10 in-lb
Unit Weight	0.53kg/pc / 1.17lb


Material Specifications

Component	Material	Plating
Body	Brass	White Bronze
Inner Conductor Male	Brass	Silver
Inner Conductor Female	Phosphor Bronze	Silver
Coupling Nut	Brass	White Bronze
Insulator	PTFE	--
O-Ring	Silicone Rubber	--

S11 TYPICAL RETURN LOSS (dB)

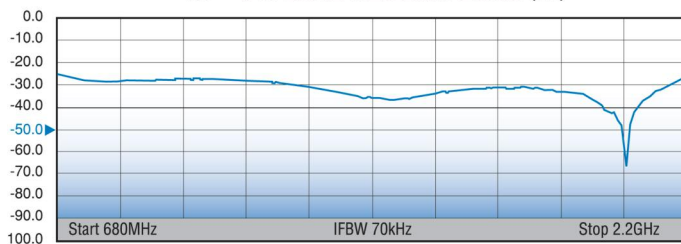

S21 TYPICAL INSERTION LOSS (dB)

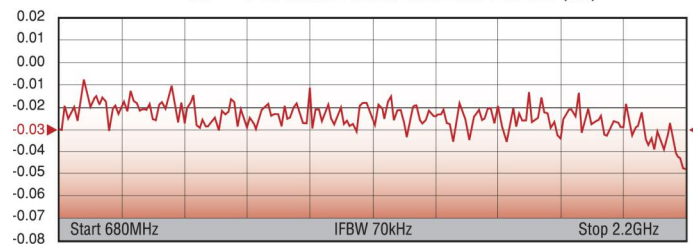

World Headquarters: 358 Hall Avenue, Wallingford, CT 06492 • Tel: 203-949-8400, 1-800-867-2629 • Fax: 203-949-8423

International Sales: 4 School Brae, Dysart, Kirkcaldy, Fife, Scotland KY1 2XB UK • Tel: +44(0)1592655428

China Sales: No. 318 Yuan Shan Road, Shanghai 201108 China • Tel: 86-21-51761234 • Fax: 86-21-64424098




www.timesmicrowave.com

LP-STRL-N-1 12/11

NOTICE OF PROPRIETARY RIGHTS

THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA, INCLUDING TRADE SECRETS, PROPRIETARY TO TIMES MICROWAVE SYTEMS. DISCLOSURE OF THIS DATA IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY. ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF TIMES MICROWAVE SYSTEMS.

REV.	REVISION DESCRIPTION	DFTM	DATE	APPD	DATE
A	RELEASED FOR PRODUCTION	M.E.	03/24/14	M.E.	03/24/14

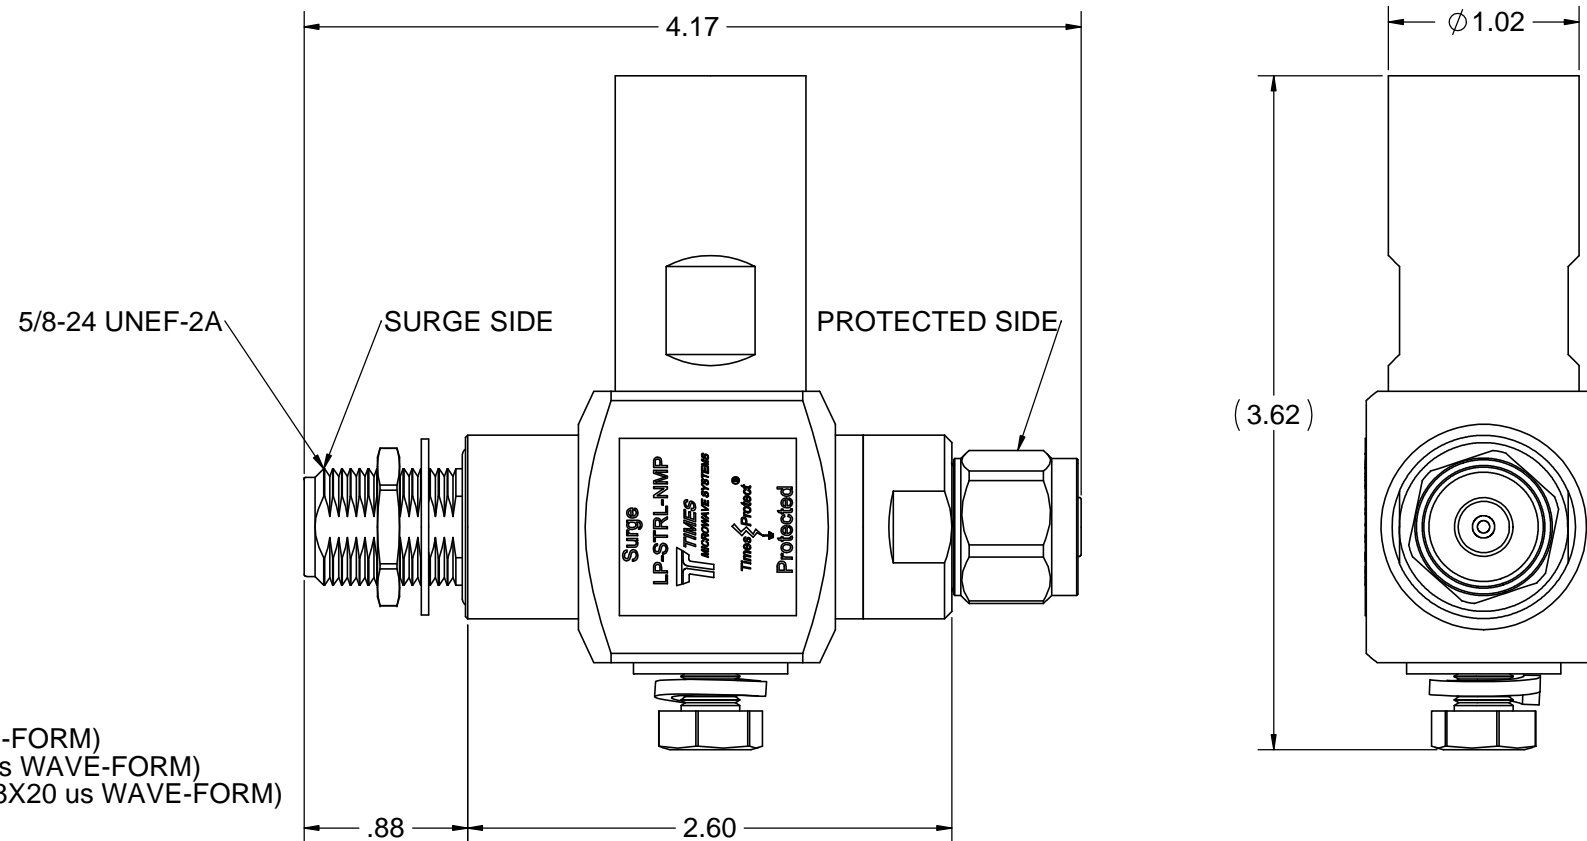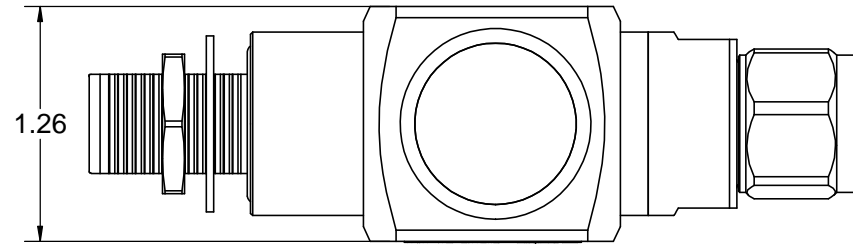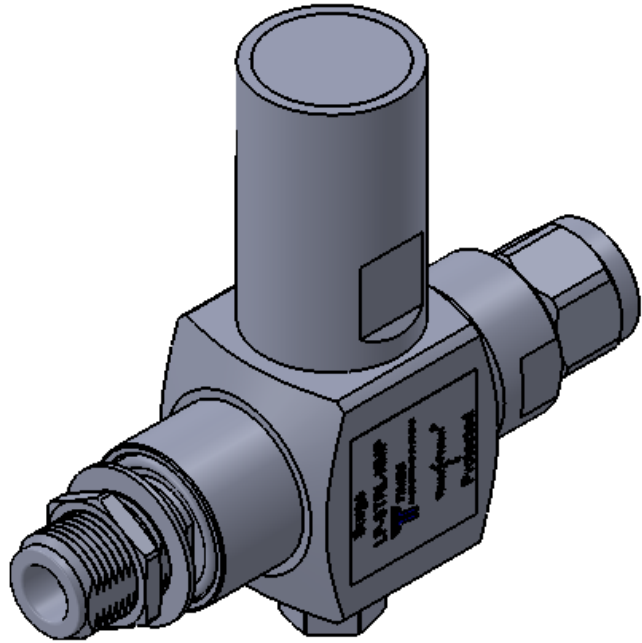

NOTES:

1. ELECTRICAL PERFORMANCE

IMPEDANCE: 50 OHMS
OPERATING FREQUENCY: 680-2200 MHz
VSWR/RETURN LOSS: < 1.13:1 / < -24 dB (680-700 MHz)
 < 1.1:1 / < -26 dB (700-2200 MHz)
INSERTION LOSS: < 0.1 dB
AVERAGE POWER: 500 W
PIM: < -160 dBc
MAX SURGE CURRENT: 50 kA (8/20 us WAVE-FORM)
RESIDUAL PULSE VOLTAGE: < 100 V (50kA 8/20 us WAVE-FORM)
RESIDUAL PULSE VOLATGE: < V (4kV/2kA 1.2X50/8X20 us WAVE-FORM)
ENERGY THROUGHPUT RATING: < 1 nJ (4kV/2kA 1.2X50/8X20 us WAVE-FORM)
PROTECTION CIRCUIT: DC BLOCKED

2. ENVIRONMENTAL CHARACTERISTICS

STORAGE/OPERATING TEMPERATURE: -40C TO +85C
WEATHERIZATION: IP67
VIBRATION: MIL-STD 202, METHOD 204, CONDITION B
WEIGHT: 1.17 lb / 0.53 kg
RoHS COMPLIANT


3. MATERIAL AND FINISH

INNER CONNECTOR MALE: BRASS, SILVER PLATE
INNER CONNECTOR FEMALE: PHOSPHOR BRONZE, SILVER PLATE
BODY: BRASS, WHITE BRONZE PLATE
COUPLING NUT: BRASS, WHITE BRONZE PLATE
INSULATOR: PTFE
O-RING: SILICONE RUBBER

MATERIAL:



USED ON ASSY.

DRAFTSMAN	M. ELLIS	03/24/14	TIMES MICROWAVE SYSTEMS		
CHECKER	M. ELLIS	03/24/14			
APPROVED	M. ELLIS	03/24/14	TITLE: SURGE PROTECTOR N FEMALE TO N MALE 680-2200 MHz		
UNLESS OTHERWISE SPECIFIED					
ALL DIMENSIONS ARE IN INCHES			DWG. SIZE  DWG. NO. LP-STRL-NMP REV. A		
MACHINED SURFACES FINISH 32 RMS MAX.					
REMOVE ALL BURRS .005 MAX. BREAK					
MACHINE CORNERS .005 MAX. FILLET R.					
TOLERANCES ON DECIMALS					
.XX ± .01 .XXX ± .005			DWG. NO. LP-STRL-NMP REV. A		
ANGLES ± 1° FRACTIONS ± 1/32					
DO NOT SCALE DRAWING			CODE IDENT. 60999	SCALE: 1.5:1	SHEET 1 OF 1

TIMES MICROWAVE SYSTEMS

TITLE: SURGE PROTECTOR
N FEMALE TO N MALE
680-2200 MHz

DWG. SIZE	C	DRWG. NO.	LP-STRL-NMP	REV. A
CODE IDENT.	689999	SCALE:	1.5:1	SHEET 1 OF 1