

Heavy-Duty KISAE Portable Powerpack delivers 800 watts of portable AC power for your home, campsite or job site




Portable Power to run tools and equipment anywhere

- Portable household AC and USB power to run consumer electronics, small appliances, and power tools
- High capacity lead acid battery provides 12V output and jump start capability
- Ideal power source for travelling, camping, and emergencies
- Enjoy the comforts of home anytime, anywhere
- Recharge at home or from a vehicle
- Jump start a dead car battery

Features and Benefits

- Confidence of never running out of power
- Indefinite battery recharge capability
- No fuel requirement and completely safe for indoor use
- Built-in handle for easy portability
- Multiple AC outlets provide up to 800W of portable household power
- Digital display to show battery and AC load status
- USB port for charging handheld devices and smart phones
- DC port for 12V devices
- Heavy duty DC port for jumpstart connection
- Ultra bright LED lights for illumination

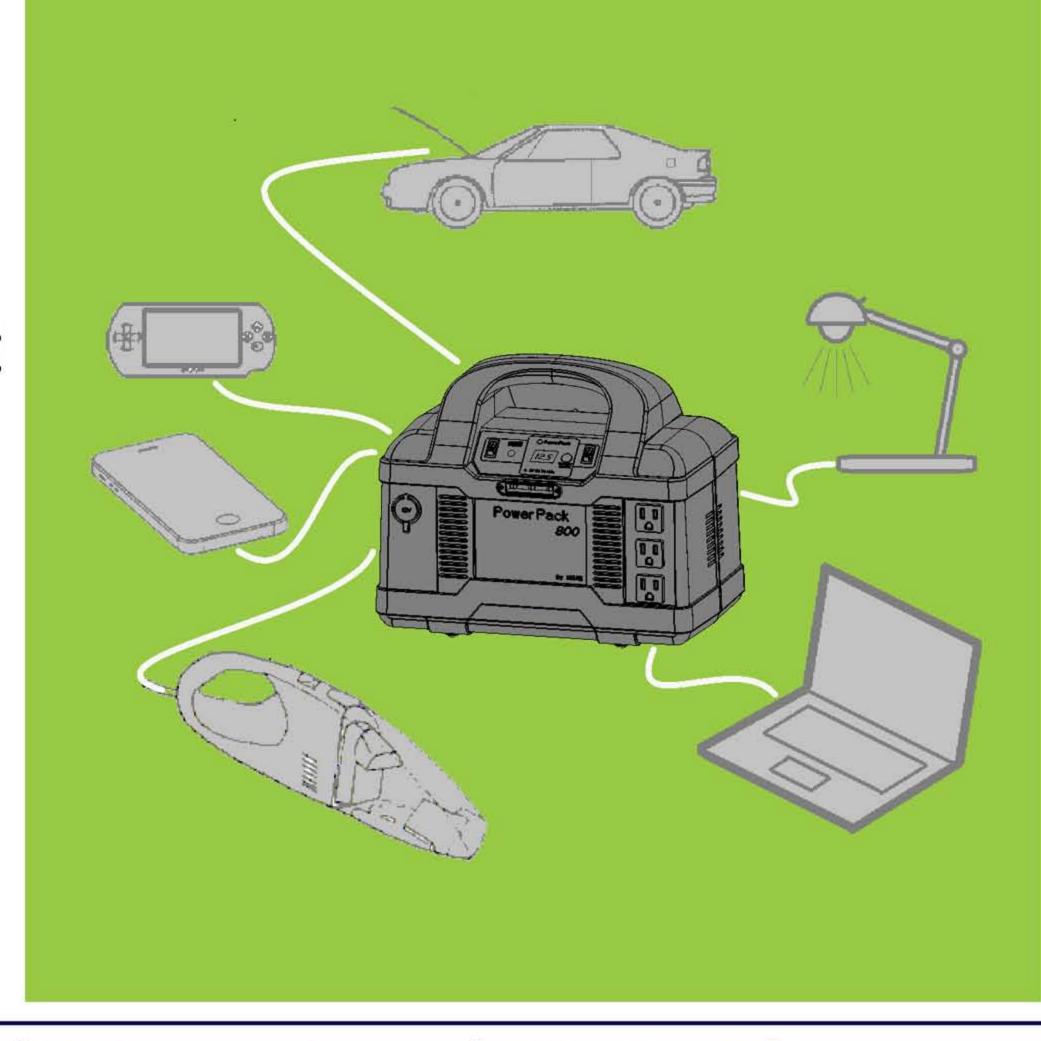

Dimensions (W x Lx H):

12.7 x 7.6 x 10.3" (323 x 193 x 262 mm)

Weight:

28.0 lb (12.7 Kg)



Portable Powerpack 800

800 W of portable AC power for your home, campsite or job site



Inverter:	Portable Powerpack	
Continuous power	800W	
Surge power	1600W	
Output voltage	120 VAC, 60Hz (120V model)	
	230 VAC, 50Hz (230V model)	
Output waveform	Modified Sinewave	
AC receptacles	3 pcs (120V model)	
	2 pcs (230V model)	
Peak efficiency	90%	
No-load battery draw	<3W	
DC Output Port:		
USB Port	5V, 2.1 A	
Battery Extension	Fuse protected	
Lighter Plug Socket	15A	
1 :1-4		
Lights:	Liltra Bright I EDe	
Туре	Ultra Bright LEDs	
Display:		
LED	Battery status	
	AC Output Power	
	Error Code	
Battery:		
Туре	Sealed Lead Acid	
Capacity	12V 26Ah (312Wh)	
Accessory:	4511100	
External AC Charger	15V / 2A	
DC Charging Cable	Lighter Plug Cable	
Jump Start Cable	Heavy Duty Cable	

Estimated Run Time			
Office Applications:			
Cell phone (5W)	30 hrs		
Inkjet printer (8W)	21 hrs		
17" LCD monitor (35W)	6.5 hrs		
Table lamp (40W)	5.5 hrs		
Table lamp (60W)	3.2 hrs		
Laptop (65W)	3 hrs		

Emergency Power Applications:		
Cordless phone (5W)	30 hrs	
Clock radio (8W)	21 hrs	
20" LCD TV (40W)	5.5 hrs	


Home Applications:		
Home alarm system (5W)	30 hrs	
Blender (300W)	15 mins	
Sump Pump (1/2 hp, 300W)	15 mins	
1/2" drill (700W)	5 mins	

How long will it provide power?		
Laptop, printer, modem & cordless phone	up to 2 hrs	
Cordless phone, TV, Radio & Table lamp	up to 1.5 hrs	

Estimated Recharging Time		
Using external AC charger	16 hrs	
Using DC Cable	3-4 hrs	





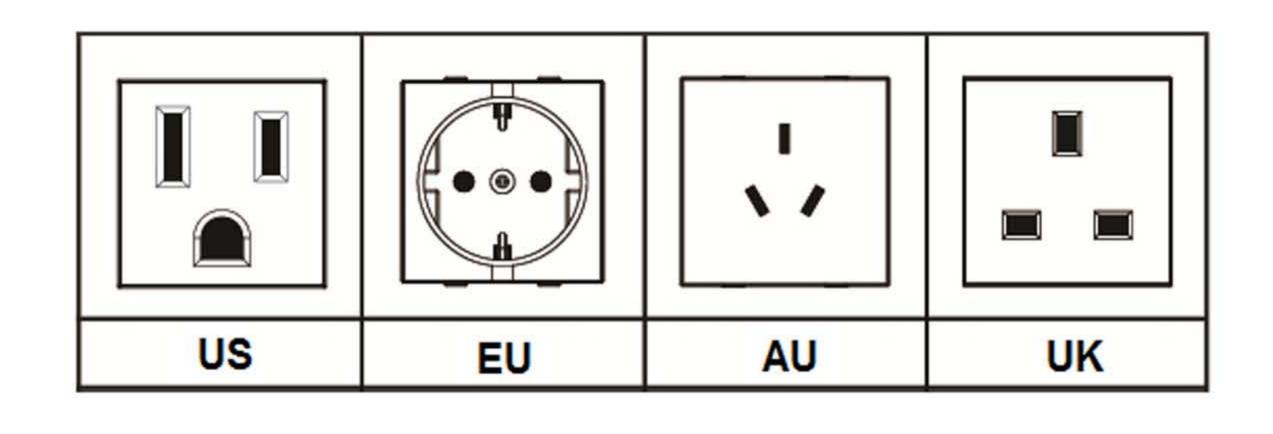





AWILCO ApS Yderholmvej 64 DK-4623 Ll. Skensved

Email: mail@awilco.dk www.awilco.dk