

TNC61EZ-L400

TNC Reverse Polarity Plug Crimp

50Ω

Technical drawing of the TNC61EZ-L400 connector. The drawing shows a side view of the plug crimp with the following dimensions:

- Overall length: 35.7 (1.406)
- Outer diameter of the main body: Ø15 (Ø.591)
- Outer diameter of the coupling nut: Ø7.5 (Ø.295)
- Outer diameter of the barrel: Ø9.6 (Ø.378)

NOTE : A spring finger design ensures easy assembly

Parts	Material	Plating (Micro-inch)
Insulator	Teflon	
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Phosphor Bronze	Gold 3 Over Nickel 50 Over Copper 50
Gasket	Silicon	
Barrel	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Coupling Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight:
Suitable Cables: JBY400


This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION

TNC61EZ-L400

JYE BAO CO., LTD.
TAIPEI TAIWAN R.O.C

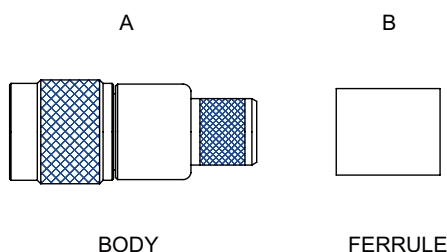


DIAGRAM

ASSEMBLY INSTRUCTION




Step 1: STRIP AS SHOWN .

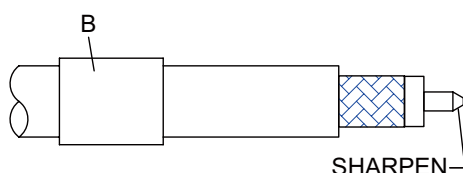


Step 2: SHARPEN CENTER CONDUCTOR TIP.
Step 3: SLIDE FERRULE " B " OVER CABLE.

NOTE: THE STRIPPED CABLE AND POINTED CENTER CONDUCTOR MUST BE STRAIGHT (180°).

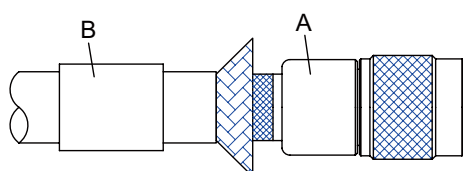

Step 4: LOOSEN BRAIDING AND SLIDE CONNECTOR " A " IN PLACE.

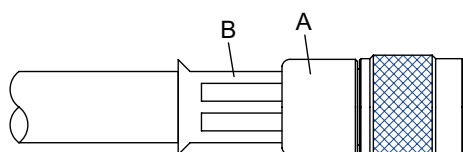

Step 5: SLIDE FERRULE " B " TOWARDS THE CONNECTOR " A " AND CRIMP.

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.