



N8146D-0316

N Jack Crimp For Panel Receptacle 50Ω

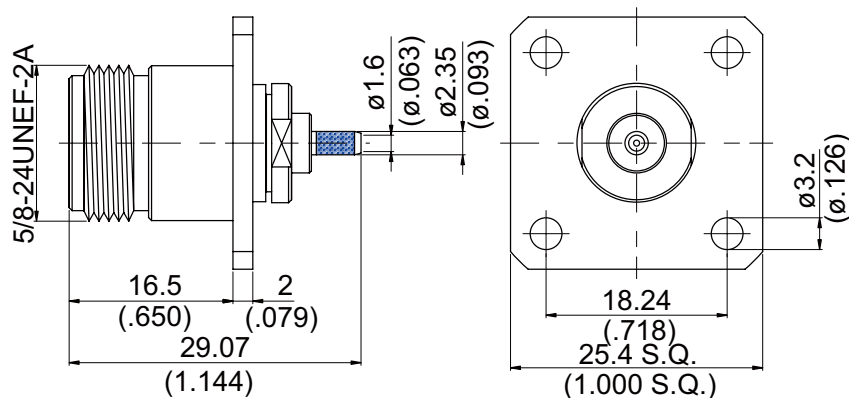

MOUNTING HOLE :

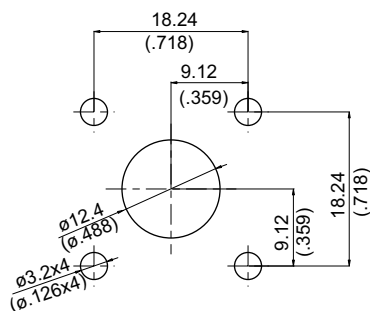

Parts	Material	Plating (Micro-inch)
Ferrule	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Solder Nut	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50
Contact Pin	Phosphor Bronze	Gold 5 Over Nickel 50 Over Copper 50
Insulator	Teflon	
Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 31.6 g

Suitable Cables: RD316, RD316-FEP, RG316-D


This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.

CABLE ASSEMBLY INSTRUCTION


N8146D-0316

JYE BAO CO., LTD.

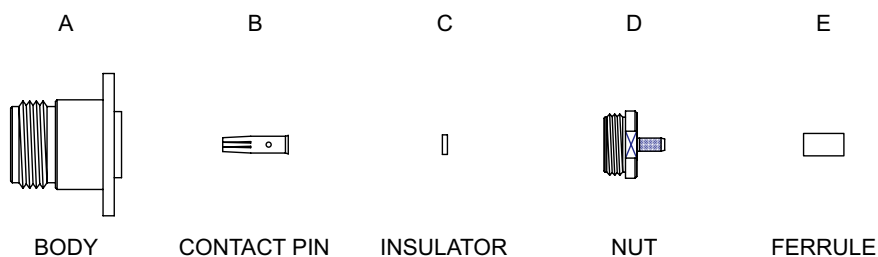


DIAGRAM


ASSEMBLY INSTRUCTION

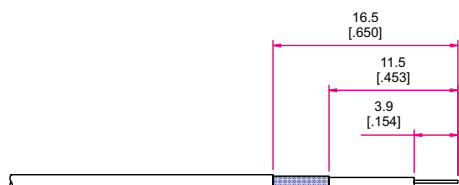


Step 1: STRIP AS SHOWN .

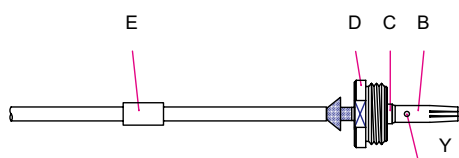

Step 2: SLIDE FERRULE " E " OVER CABLE.
Step 3: LOOSEN BRAIDING AND SLIDE NUT " D " IN PLACE.
Step 4: PUT INSULATOR " C " AND PIN " B " ON CENTER CONDUCTOR AND SOLDER IN " Y " .

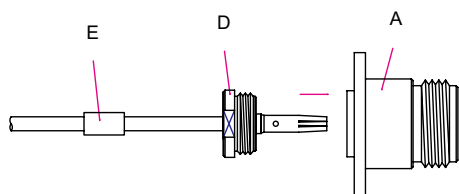

Step 5: SCREW " D " ON THE CONNECTOR BODY " A " .

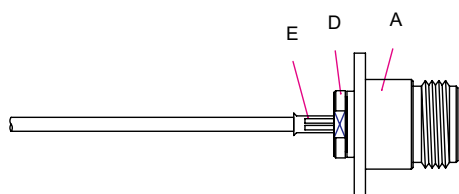

Step 6: SLIDE FERRULE " E " TOWARDS THE NUT " D " AND CRIMP.

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.