


SMA9300-0141

SMA Reverse Polarity Jack Solder 50Ω

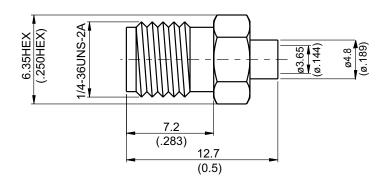

	_	
Parts	Material	Plating (Micro-inch)
Contact Pin	Brass	Gold 20 Over Nickel 50 Over Copper 50
Insulator	Teflon	
Body	Brass	Gold 5 Over Nickel 50 Over Copper 50

Weight: 1.54 g

Suitable Cables: Semi-rigid.141

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.



CABLE ASSEMBLY INSTRUCTION SMA9300-0141 JYE BAO CO., LTD. С В **INSULATOR CONTACT PIN BODY** DIAGRAM ASSEMBLY INSTRUCTION 2.5 [.098] Step 1: STRIP AS SHOWN. Step 2: INSERT CABLE'S CENTER CONDUCTOR INTO CENTER PIN AND SOLDER IN "Y", USE 0.17 MM GAGE. ST-010 Step3: PUT CABLE INTO SOLDERING FIXTURE "ST-008". AND LOCK IT. PUT CONNECTOR AS SHOWN. Step4: SCREW LOCATOR TOOL "ST-011" TO THE POSITION AS SHOWN IN "S", AND SOLDER IN "X". ST-011 ST-008 Step5: USE DIELECTRIC INSERTION TOOL "ST-004" TO INSERT THE TEFLON "A".

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.