


業務部

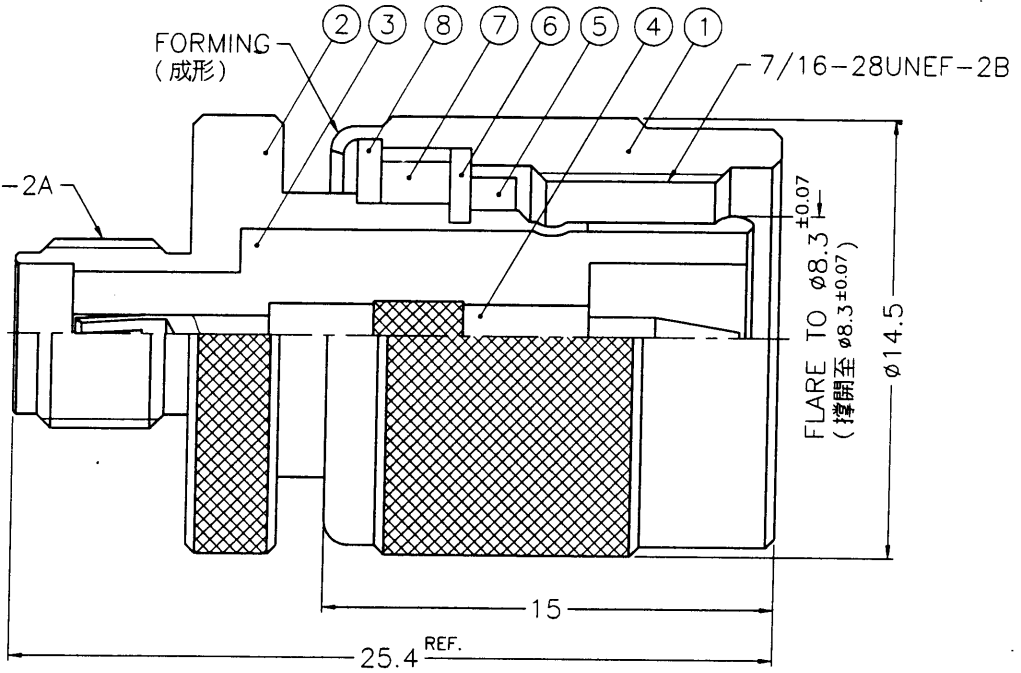

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. BRASS PER QQ-B-613
3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
4. PHOSPHOR BRONZE PER QQ-B-750
5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
6. TEFLON MIL-P-19468

出圖
89.3.23
設計部

8	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				PART NO.		Amphenol – Kai Jack TAINAN TAIWAN					
7	RING	DELIN	NATURAL	1	T50000-6-A					APPROVED <i>Dark C</i>						DATE 03-22-00'	
6	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5					CHECKED <i>Andy C</i>						DATE 03-22-00'	
5	GASKET	RUBBER	RED	1	GS-105/8X15					DRAWN <i>Gene L</i>						DATE 03-22-00'	
4	CONTACT PIN	NOTE 4	NOTE 5	1	RSA-3472-4					TITLE SMA FEMALE TO TNC MALE ADAPTOR							
3	INSULATOR	NOTE 6	NATURAL	1	RSA-3472-3											DRAWING NO. KJ-SMAF-TM-NT3G-50	
2	BODY	NOTE 1	NOTE 3	1	RSA-3472-2-B	FILE NO. F:\DWG\SMF\TM\50\NT3G											
1	SHELL	NOTE 1	NOTE 3	1	T50000-1-B												
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	4/1	ISSUE	A								