




## TNC8346-0085 TNC Jack Solder For Panel Receptacle 50Ω

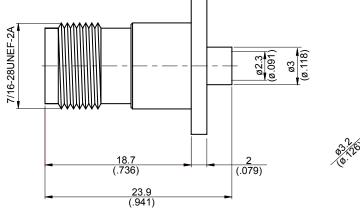



## MOUNTING HOLE:



	Parts	Material	Plating (Micro-inch)
_	Contact Pin	Phosphor Bronze	Gold 3 Over Nickel 50 Over Copper 50
-	Insulator	Teflon	
_	Body	Brass	Tin-Zinc-Copper-Alloy 100 Over Copper 50

Weight: 11.91 g

Suitable Cables: Semi-rigid.085

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.



## CABLE ASSEMBLY INSTRUCTION TNC8346-0085 JYE BAO CO., LTD. В · · **CONTACT PIN BODY** DIAGRAM ASSEMBLY INSTRUCTION Step 1: STRIP AS SHOWN. 4 [.158] Step 2: PUT 0.51 MM GAGE IN PLACE, INSERT CABLE'S CENTER CONDUCTOR INTO CENTER PIN " B " AND SOLDER IN " Y ". 0.51 GAGE ST-009 Step 3: INSERT PREPARED CABLE INTO CONNECTOR BODY " A " AND USE SOLDERING FIXTURE " ST-008 ", INSERT TOOL " ST-009 " AND LOCATOR TOOL " ST-011 " TO FIX THE CONNECTOR. SOLDER IN " X ". ST-008

This part number complies with RoHS.

Notice: JYEBAO reserves the right to make modifications deemed appropriate.