

## LP-STRL-D Series

- Long Term Evolution (LTE) and 700 MHz Public Safety Applications
- Excellent PIM Performance
- Outstanding IL/RL Characteristics
- DC Blocked for Superior Surge Performance
- High Surge Current/Power Rated
- Broadband Multi-Strike Design
- Fully Weatherized Housing
- Solid Brass Construction for Durability and Long Life



**100% PIM Tested**


## Lightning and Surge Protection for The 21st Century™

The **Times Protect™** high performance series is an exceptional DC blocked design for outstanding surge performance, capable of withstanding multiple lightning strikes. The operating band width of 680MHz-2200MHz makes the LP-STRL-D series suitable for a broad range of applications. This design covers the 700MHz Band for Public Safety Services as well as LTE (Long Term Evolution) applications. With its excellent passive intermodulation performance, outstanding RF performance over the entire operating band and superior power handling capability, the LP-STRL-D product family is unequalled. Its fully weatherized housing meeting IP67 standard allows for outdoor as well as indoor installation.


- LP-STRL-DFF  
716 DIN Female connectors on surge and protected side
- LP-STRL-DMP  
716 DIN Male connector on protected side with 716 DIN Female connector on surge side
- LP-STRL-DMS  
716 DIN Male connector on surge side with 716 DIN Female connector on protected side




# Times-Protect™

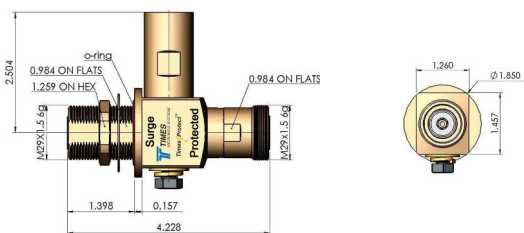

- LP-STRL-DFF  
680-2200MHz DC Blocked DIN Type F/F

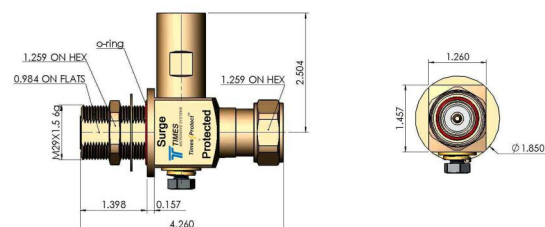

- LP-STRL-DMP  
680-2200MHz DC Blocked DIN Type M on Protected

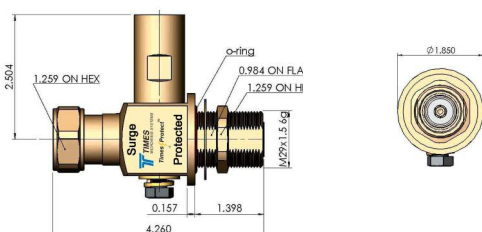

- LP-STRL-DMS  
680-2200MHz DC Blocked DIN Type M on Surge

\*All dimensions shown in inches

## Electrical Specifications



Impedance	50 $\Omega$
Frequency Range	680-2200 MHz
VSWR / Return Loss	< 1.13:1 / < -24dB (680-700MHz) < 1.1:1 / < -26dB (700-2200MHz)
Insertion Loss	< 0.1dB
Average Power	700 Watts
PIM	< -160 dBc
Maximum Surge Current	50kA (8/20 $\mu$ s wave-form)
Residual Pulse Voltage	< 100V (50kA 8/20 $\mu$ s wave-form)
Residual Pulse Voltage	< 1V (4kV/2kA 1.2x50/8x20 $\mu$ s wave-form)
Energy Throughput Rating	< 1nJ (4kV/2kA 1.2x50/8x20 $\mu$ s wave-form)
Protection Circuit	DC Blocked

## Mechanical / Environmental Specifications

Temp Range Storage/Operating	-40°C - +85°C
Weatherization	IEC 60068 55/155/56 & IP67
Thermal Shock	US MIL-STD 202, Meth.107,Cond.B
Vibration	US MIL-STD 202, Meth.204,Cond.B
Shock	US MIL-STD 202, Meth.213,Cond.I
RoHS Compliant	Yes
Mating Life Cycle	> 500
Recommended Coupling Nut Torque	220 to 300 lb-in
Unit Weight	0.6kg/pc \ 1.32lb

## Material Specifications

Component	Material	Plating
Body	Brass	White Bronze
Inner Conductor Male	Brass	Silver
Inner Conductor Female	Phosphor Bronze	Silver
Coupling Nut	Brass	White Bronze
Insulator	PTFE	--
O-Ring	Silicone Rubber	--


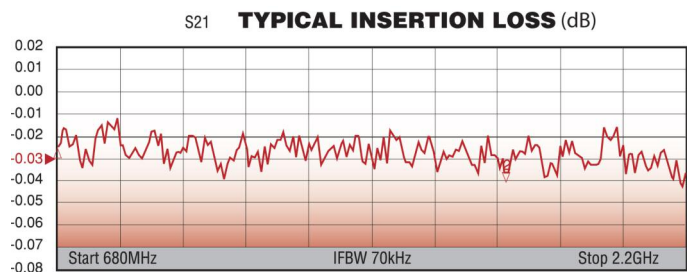
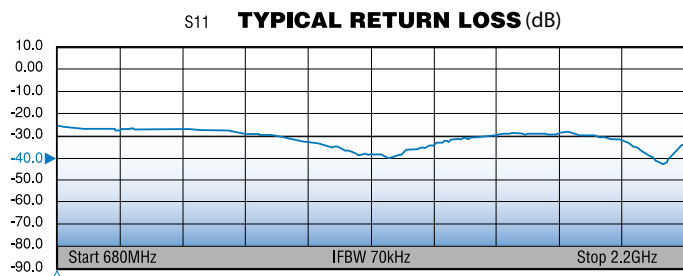


World Headquarters: 358 Hall Avenue, Wallingford, CT 06492 • Tel: 203-949-8400, 1-800-867-2629 • Fax: 203-949-8423  
 International Sales: 4 School Brae, Dysart, Kirkcaldy, Fife, Scotland KY1 2XB UK • Tel: +44(0)1592655428  
 China Sales: No. 318 Yuan Shan Road, Shanghai 201108 China • Tel: 86-21-51761234 • Fax: 86-21-64424098  
[www.timesmicrowave.com](http://www.timesmicrowave.com)

LP-STRL-D-1 9/10

NOTICE OF PROPRIETARY RIGHTS  
THIS DOCUMENT CONTAINS CONFIDENTIAL TECHNICAL DATA, INCLUDING TRADE SECRETS, PROPRIETARY TO TIMES MICROWAVE SYSTEMS. DISCLOSURE OF THIS DATA IS EXPRESSLY CONDITIONED UPON YOUR ASSENT THAT ITS USE IS LIMITED TO USE WITHIN YOUR COMPANY ONLY. ANY OTHER USE IS STRICTLY PROHIBITED WITHOUT THE PRIOR WRITTEN CONSENT OF TIMES MICROWAVE SYSTEMS.

REV.	REVISION DESCRIPTION	DFIM	DATE	APPD	DATE
A	RELEASED FOR PRODUCTION	M.E.	03/24/14	M.E.	03/24/14

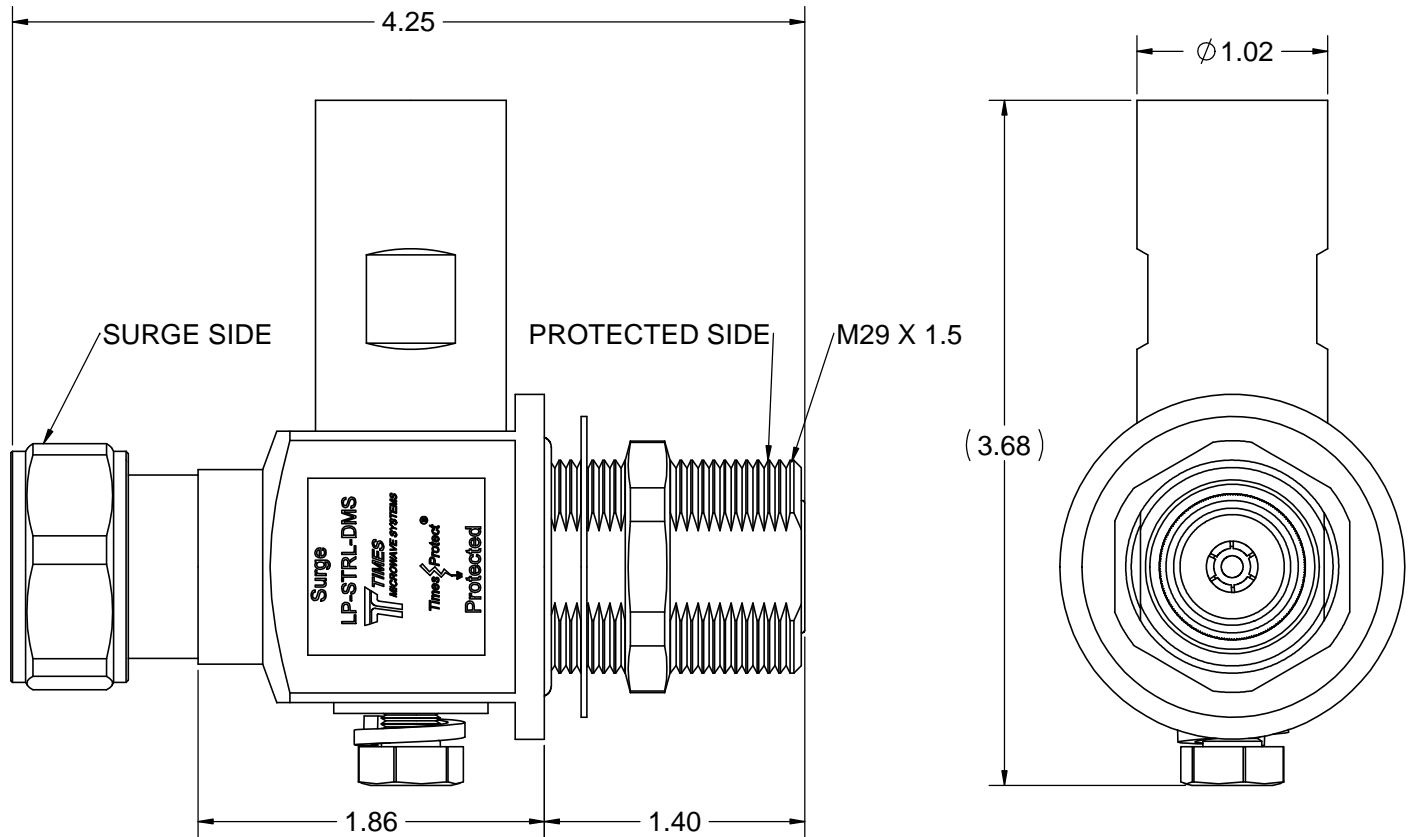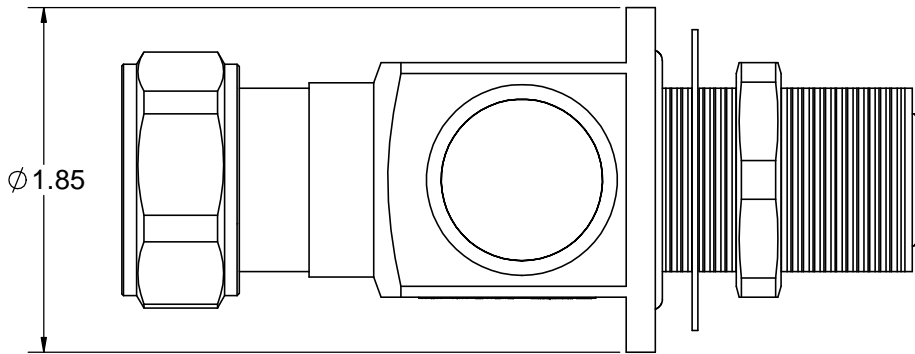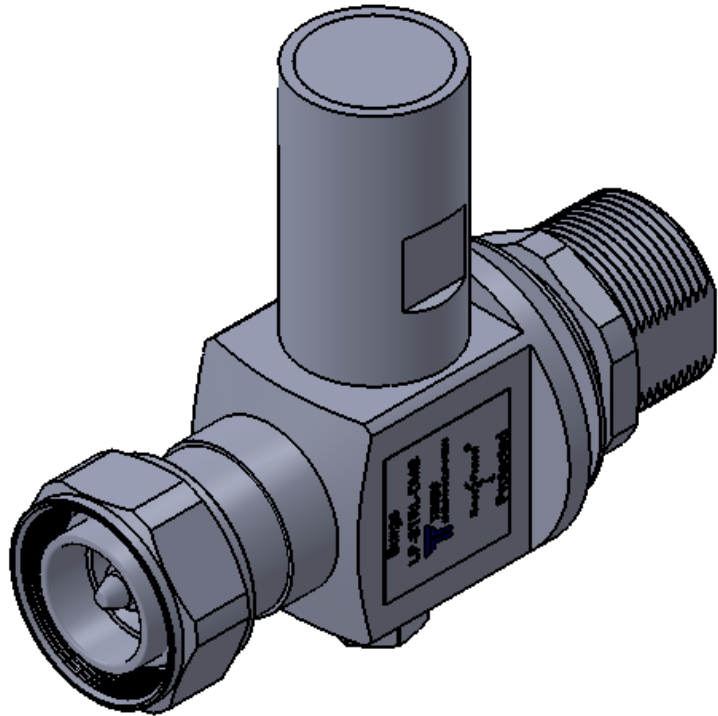

NOTES:

1. ELECTRICAL PERFORMANCE

IMPEDANCE: 50 OHMS  
OPERATING FREQUENCY: 680-2200 MHz  
VSWR/RETURN LOSS: < 1.13:1 / < -24 dB (680-700 MHz)  
< 1.1:1 / < -26 dB (700-2200 MHz)  
INSERTION LOSS: < 0.1 dB  
AVERAGE POWER: 700 W  
PIM: < -160 dBc  
MAX SURGE CURRENT: 50 kA (8/20 us WAVE-FORM)  
RESIDUAL PULSE VOLTAGE: < 100 V (50kA 8/20 us WAVE-FORM)  
RESIDUAL PULSE VOLATGE: < 1 V (4kV/2kA 1.2X50/8X20 us WAVE-FORM)  
ENERGY THROUGHPUT RATING: < 1 nJ (4kV/2kA 1.2X50/8X20 us WAVE-FORM)  
PROTECTION CIRCUIT: DC BLOCKED

2. ENVIRONMENTAL CHARACTERISTICS

STORAGE/OPERATING TEMPERATURE: -40C TO +85C  
WEATHERIZATION: IP67  
VIBRATION: MIL-STD 202, METHOD 204, CONDITION B  
WEIGHT: 1.32 lb / 0.6 kg  
RoHS COMPLIANT

3. MATERIAL AND FINISH

INNER CONNECTOR MALE: BRASS, SILVER PLATE  
INNER CONNECTOR FEMALE: PHOSPHOR BRONZE, SILVER PLATE  
BODY: BRASS, WHITE BRONZE PLATE  
COUPLING NUT: BRASS, WHITE BRONZE PLATE  
INSULATOR: PTFE  
O-RING: SILICONE RUBBER

MATERIAL:



USED ON ASSY.

DRAFTSMAN	M. ELLIS	03/24/14
CHECKER	M. ELLIS	03/24/14
APPROVED	M. ELLIS	03/24/14

UNLESS OTHERWISE SPECIFIED		
ALL DIMENSIONS ARE IN INCHES		
MACHINED SURFACES FINISH 32 RMS MAX.		
REMOVE ALL BURRS .005 MAX. BREAK		
MACHINE CORNERS .005 MAX. FILLET R.		
TOLERANCES ON DECIMALS		
.XX ± .01	.XXX ± .005	
ANGLES ± 1°	FRACTIONS ± 1/32	
DO NOT SCALE DRAWING		

TIMES MICROWAVE SYSTEMS

TITLE: SURGE PROTECTOR  
DIN MALE TO DIN FEMALE  
680-2200 MHz

DWG. SIZE	C	DRWG. NO.	LP-STRL-DMS	REV.	A
CODE IDENT.	68999	SCALE:	1.5:1	SHEET 1 OF 1	